


Measurement Solutions Product Guide

The
Instrumentation
Company

NOSHOK
INCORPORATED

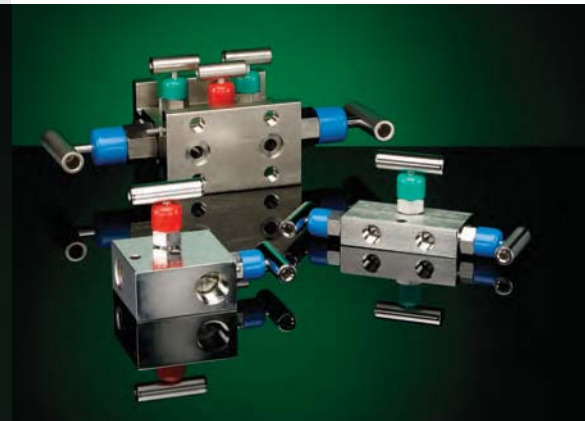

Dial Indicating
Digital
Differential
& Sanitary
Gauges

Diaphragm Seals
& Accessories



At NOSHOK, we pride ourselves on being innovators in the industry by continually offering the latest technology and measurement solutions, and providing the best customer support in the marketplace.

Established in 1967, NOSHOK was one of the first companies to offer liquid filled pressure gauges. We also took a bold step by backing our quality gauges with an extended three year warranty. That unwavering standard of quality has endured for over 45 years, and as we have expanded our product offering we continue to provide industry-leading warranties. NOSHOK also leads the industry as one of the first companies to offer corrosion-resistant zinc-nickel plating standard on our carbon steel valves.

We have the capacity to put together special requirements which are so often hard to find. If you do not find what you need in this catalog, chances are we can still put a solution together.

NOSHOK is committed to providing excellence on every level. Thank you for choosing NOSHOK Products.



Jeff N. Scott
President



NOSHOK Corporate Headquarters
Your Single Source Instrumentation Company

NOSHOK is a member and actively supports:



NOSHOK is an ISO 9001:2008 registered company

T A B L E O F C O N T E N T S

The
Instrumentation
Company



PRESSURE AND LEVEL MEASUREMENT SOLUTIONS

Pressure Gauges

100, 200, 300, 400/500, 600/700, 800, 900 and 1000 SERIES4-5

Pressure Gauge Accessories & Options6-7

Differential Pressure Gauges

1000, 1100, 1200 and 1300 SERIES 8

Digital Indicators

1800, 1900C, 1950 and 2000/2100 SERIES 9

Pressure and Level Transmitters & Transducers

100, 200, 300, 612, 615/616, 630, 640, 650, 660 and 755/756 SERIES..... 10-13

Hazardous Location Transmitters

621/622, 623/624, 625/626, 627, 630, 640 and 650 SERIES..... 11-12

Pressure Switches & Switch/Transmitters

100, 200, 300, 400, 500 and 800/810 SERIES..... 13-14

Sanitary Pressure Instruments

10, 11, 20 and 21 SERIES 15

Diaphragm Seals

Type 5, 10, 10L, 10H, 10H1, 12, 20, 25, 25H, 29, 30, 30H, 30H1 and 30L 16-17

TEMPERATURE MEASUREMENT SOLUTIONS

Bimetal Thermometers

100 and 300 SERIES 18

Temperature Transmitters & Switch/Transmitters

800 and 850 SERIES 18

Vapor Actuated Remote Thermometers and Thermowells 19

FORCE MEASUREMENT SOLUTIONS

Hydraulic Load Cells

1000, 2000, 3000, 4000 and 5000 SERIES 19-20

Custom Force Sensors 21

Chain Hoist Test Kit & Weld Force Test Kit..... 22

Load Pins, Tension and Compression Force Transducers, S-Type 22-23

VALVE PRODUCT SOLUTIONS

Needle Valves

100/140, 150/190, 200/300, 400/500, 600/700, 800/850,
2070/2170 and 3070 SERIES23-25

Manifolds Valves

2-Valve Static Pressure & Liquid Level Manifolds

2000/2100, 2020/2120, 200002/210002, 200402/210402, 2602/2702,
2603/2703, 2604/2704, and 2180 SERIES25-27

3-Valve Differential Pressure Manifolds

3010/3110, 3510 and 3610/3710 SERIES..... 27-28

5-Valve Natural Gas Manifolds 5030/5130, and 5530 SERIES28-29

Valve Accessories 29

Please refer to the individual product catalogs for detailed warranty information.

In keeping with and for purpose of product and/or manufacturing process improvements,
NOSHOK, INC. reserves the right to make design changes without prior notice.

PRESSURE GAUGES

SPECIFICATIONS

SIZES: 1-1/2, 2, 2-1/2 and 4"

CONNECTION LOCATION: Bottom, back, left and right side connections

CONNECTION SIZE: 1/8" NPT and 1/4" NPT dependent upon model and size. Other connections available upon special request.

CASE: ABS is standard. Steel, chrome and stainless steel are available as options

LENS: Plexiglass is standard; glass is available as an option on certain models

BOURDON TUBE: Brass and copper alloys

MOVEMENT: All brass or brass and Delrin®

ACCURACY: ±1-1/2% Full scale to ±2.5% Full scale dependent on model

AVAILABLE RANGES: Vacuum and compound through 15,000 psi

OPTIONS AND ACCESSORIES: Panel mount options, cover rings, orifices, rubber case protectors, recalibrators, special connections and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)



100 SERIES

NOSHOK STANDARD GAUGES are high quality dry gauges designed to provide reliable service on applications not corrosive to brass. They are used in almost every area of manufacturing and are especially suited for applications in hydraulics, pneumatics, process, petrochemical, medical, pharmaceutical and most industrial and commercial applications.

WARRANTY: One Year[†]

SPECIFICATIONS

SIZES: 2, 2-1/2 and 4"

CONNECTION: Bottom, back, left and right side connections

CASE: ABS, Black painted steel or 304 stainless steel dependent on model and size, Gas pressure test kit available (in 2-1/2" size only, 20 oz./35 inH₂O)

LENS: Clearfront plexiglass on the 2-1/2" size, instrument glass on the 4" size

DIAPHRAGM CAPSULE: Copper alloy

MOVEMENT: Brass, bearing parts highly polished nickel silver with zero point adjustment

ACCURACY: 2-1/2", ± 1.5% Full scale; 4", ±1% Full scale

AVAILABLE RANGES: 0-100" H₂O Vacuum through 0-10 psi

OPTIONS AND ACCESSORIES: Panel mount options, orifices, over-pressure protection, custom ranges and dials, special connections and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)



200 SERIES

NOSHOK LOW PRESSURE DIAPHRAGM GAUGES are designed for extremely low pressure and vacuum measurement. The ultra sensitive copper alloy diaphragm capsules are rated for pressure as low as 0-10 inH₂O and as high as 0-10 psi. Applications include HVAC service, filtration, gas distribution, waste water treatment, medical and everywhere low pressure and vacuum measurement is required.

WARRANTY: One Year[†]

SPECIFICATIONS

SIZES: 2-1/2" and 4"

CONNECTION: 1/4" NPT bottom and back. 7/16"-20 SAE-4 and 1/2" NPT available

CASE: One piece die cast brass

LENS: Molded plexiglass with o-ring seal

BOURDON TUBE: 2-1/2" size: phosphor bronze through 6,000 psi and 316 stainless steel on higher ranges 4" size: phosphor bronze through 800 psi and 316 stainless steel on higher ranges

MOVEMENT: Brass and nickel silver

ACCURACY: 2-1/2", ± 1.5% Full scale; 4", ±1% Full scale

AVAILABLE RANGES: Vacuum and compound through 15,000 psi

OPTIONS AND ACCESSORIES: Panel mount options, cover rings, max indicating pointers, orifices, rubber case protectors, special connections, metric dials and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)



300 SERIES

NOSHOK BRASS CASE LIQUID FILLED GAUGES are the highest quality, most reliable liquid filled gauges available. Their one piece die cast brass case and heavy duty bourdon tube and movement enables them to stand up to shock and vibration encountered on the most demanding applications.

WARRANTY: Three Years[†]

SPECIFICATIONS

SIZES: 1-1/2, 2, 2-1/2, 4 and 6"

CONNECTION: 1/8" NPT on 1-1/2" sizes, 1/4" NPT on 2, 2-1/2 and 4" sizes, 1/2" NPT on 4" and 6" sizes. Available in bottom and back configurations

CASE: 304 stainless steel

LENS: Plexiglass on 1-1/2" and 2", Trogamide on 2-1/2", Instrument glass on 4" and safety glass on 6" sizes

BOURDON TUBE: 316 stainless steel

MOVEMENT: 300 Series stainless steel

ACCURACY: ± 2.5% Full scale on 1-1/2" and 2" sizes; ± 1.5% Full scale on 2-1/2" size; ± 1% Full scale on 4" and 6" sizes

AVAILABLE RANGES: Vacuum and compound through 100,000 psi. dependent on model and size

OPTIONS AND ACCESSORIES: Panel mount options, orifices, adjustable pointers, max indicating pointers, metric and special dials, special connections and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 400 Series: -40 °F to 260 °F (-40 °C to 127 °C)
500 Series: 0 °F to 160 °F (-18 °C to 71 °C)



400/500 SERIES

NOSHOK DRY AND LIQUID FILLED ALL STAINLESS STEEL GAUGES are the ultimate corrosion resistant, heavy duty, vacuum and pressure gauges. They are used in corrosive service world-wide where ruggedness and reliability are critical. Typical applications include chemical and petroleum refineries, pharmaceutical, offshore drilling and production, paper mills and more.

WARRANTY: 400 Series: One Year[†]

500 Series: Three Years[†]

Extreme High Pressure Ranges Available

SPECIFICATIONS

SIZES: 1-1/2, 2, 2-1/2 and 4"

CONNECTION LOCATION: Bottom, back, left and right side connections

CONNECTION SIZE: 1/8" NPT and 1/4" NPT dependent upon model and size. Other connections available upon special request

CASE: ABS is standard. Steel, chrome and stainless steel are available as options

LENS: Plexiglass is standard. Glass is available as an option on certain models

BOURDON TUBE: Brass and copper alloys

MOVEMENT: All brass or brass and Delrin®

ACCURACY: ±1-1/2% Full scale to ±2.5% Full scale dependent on model

AVAILABLE RANGES: Vacuum and compound through 15,000 psi

OPTIONS AND ACCESSORIES: Panel mount options, cover rings, orifices, rubber case protectors, recalibrators, special connections and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)



600/700 SERIES

NOSHOK PROCESS GAUGES made with copper alloy or 316 stainless steel internals and phenolic cases are specifically designed for demanding service in chemical, petroleum and industrial processing industries. They are widely used throughout the world on applications where accuracy, readability, safety and reliability are important.

WARRANTY: 640/740 Series: One Year†
660/760 Series: Three Years†

Extreme High Pressure and Extreme Low Pressure
Diaphragm Ranges Available

SPECIFICATIONS

SIZES: 6"

CONNECTION: 1/4" NPT bottom connection, 1/2" NPT standard for 20,000 psi

CASE: 304 stainless steel

BEZEL: 304 stainless steel

LENS: Instrument glass

BOURDON TUBE: beryllium copper

MOVEMENT: jeweled, brass and nickel silver

ACCURACY: ± 0.25% Full scale on 1-1/2 and 2"

AVAILABLE RANGES: Vacuum and compound through 20,000 psi

OPTIONS AND ACCESSORIES: Panel mount options, orifices, special connections, carrying cases and more

OPERATING LIMITATIONS WORKING PRESSURE:

STATIC: 100% of dial range (Not recommended for dynamic applications)

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)

Reference calibration temp: 70 °F (21 °C)



800 SERIES

NOSHOK PRECISION TEST GAUGES are the highest quality test gauges with accuracy levels meeting ANSI B40.1 Grade 3A. They are used in laboratories, calibration stands, aerospace and wherever accuracy and sensitivity are critical parameters in measurement. The NOSHOK adjustable knife-edge pointer in conjunction with the mirror dial band eliminate parallax* error. (*The difference in apparent direction of an object as seen from two different points not on a straight line with the object.)

WARRANTY: One Year†

SPECIFICATIONS

SIZES: 1-1/2, 2-1/2 and 4"

CONNECTION: 1/8" NPT back connection on 1-1/2" size, 1/4" NPT bottom and back on 2-1/2" and 4" sizes

CASE: ABS or 304 stainless steel dependent on model

LENS: Plexiglass™ or polycarbonate on 1-1/2 and 2-1/2"

instrument glass on 4"

BOURDON TUBE: brass and copper alloy

MOVEMENT: brass and Delrin, and all brass

ACCURACY: ±2.5% Full scale on 1-1/2 and 2",

±1.5% Full scale 2-1/2" sizes; ±1% Full scale on 4" sizes

AVAILABLE RANGES: Vacuum and compound through 15,000 psi

OPTIONS AND ACCESSORIES: Panel mount options, orifices, rubber case protectors, special connections, special dials and more

OPERATING LIMITATIONS WORKING PRESSURE:

DYNAMIC: 60% of dial range

STATIC: 90% of dial range

TEMPERATURE: 0 °F to 140 °F (-18 °C to 60 °C)



900 SERIES

NOSHOK ABS AND STAINLESS STEEL CASE LIQUID FILLED GAUGES are high quality gauges that incorporate unique design features aimed at extended service life and reliability. They are used world-wide where pulsation, vibration and shock are present and the media is not corrosive to brass.

WARRANTY: Three Years†

SPECIFICATIONS

HOUSING MATERIAL: Stainless steel

DISPLAY: 0.43" high liquid crystal display

DIGITS: 4 STD. 4-1/2, up to 9999

WETTED MATERIALS: ≤750 psig stainless steel,

aluminum, NBR, ceramic measuring element

≥1000 psig stainless steel, thin-film measuring element

ACCURACY: ±0.25% Full scale (B.F.S.L.);

±0.5 Terminal point

UPDATE RATE: 5 times/second

PRESSURE RANGES: Standard gauge ranges from

30 psig to 10000 psig; compound ranges from

30/30 psig through 30/600 psig

TEMPERATURE RANGES: Storage: -4 °F to 158 °F

(20 °C to 70 °C); Media: -22 °F to 185 °F (-30 °C to 85 °C);

Ambient: 14 °F to 140 °F (-10 °C to 60 °C)

PROOF PRESSURE: 2 times Full scale range, maximum 15000 psi

POWER SUPPLY: 2 x 1.5V AA battery 4000 hrs (AA 2000 mAh)

ON/OFF SWITCH: Manual; auto shut-off optional

PROGRAMMABLE FUNCTIONS: Adjustable through front key pad

Tare: ±20% of Full scale range; On/Off: Adjustable automatic turn off

Measuring Unit: bar, psi, MPa

CE Compliant to EN61326, EMI and ESD protection;
NEMA 4X to EN60529/IEC529



1000 SERIES

NOSHOK DIGITAL PRESSURE GAUGES are designed to exceed the industry's most demanding application requirements. Using the latest in reliable ceramic thick film strain gage technology combined with low power electronics, these gauges are accurate, stable and extremely reliable. The 1000 Series gauges are ideally suited for local indication.

Shown with enhanced software.

WARRANTY: Three Years†

†For further warranty information please consult your specific product catalogs.

PRESSURE GAUGE ACCESSORIES & OPTIONS

PIGTAIL STEAM
SYPHONS



PISTON TYPE
SNUBBERS



SWIVEL
ADAPTER



SINTERED SNUBBER REPLACEMENT DISCS



CHROME
FRONT FLANGE



PANEL MOUNT CLAMP

POLISHED BRASS
FRONT FLANGE



CHROME TRIANGULAR BEZEL
WITH U-CLAMP



REAR FLANGE

PIGTAIL STEAM SYPHONS protect the instrument from the damaging effects of high temperature steam and should be used in all steam applications. They are available in 1/4" and 1/2" NPT sizes in welded steel, welded 316 stainless steel or seamless 316 stainless steel with ratings to 3800 psi @ 850 °F.

PISTON TYPE SNUBBERS resist clogging and are self cleaning. Five different sized pistons are included with each snubber to insure the correct amount of snubbing for virtually every application. They are available in brass and 316 stainless steel in either 1/4" NPT, 1/2" NPT or 7/16-20 SAE-4

WARRANTY: One Year*

SINTERED SNUBBERS are a cost-effective solution to protect expensive instrumentation. These snubbers increase gauge readability by smoothing out pressure surges, pulsations and spikes, and they eliminate instrument failure due to pressure shock. Five basic discs are available to accommodate 90% of applications. Snubbing action is achieved by utilizing a corrosion-resistant 316 stainless steel sintered element; exotic materials or intermediate disc grades are available on a per order basis. NOSHOK Sintered Snubbers provide long service life with no moving parts to wear out.

SWIVEL ADAPTERS are used with gauges and gauge valves to adjust the line of sight. The swivel adapter rotates 360° to allow the connected instrument to be positioned in the desired direction and has temperature ratings of 15,000 psi @ 200 °F and 3,000 psi @ 1000 °F. The pressure connection is achieved with a tapered cone style compression fitting simply by tightening the swivel hex nut. They feature all 316 stainless steel construction, and are standard with 1/2" NPT male process - 1/2" NPT female instrument connections. Also available with 1/4" NPT connections.

PANEL MOUNTING

Many panel mounting options are available and can be installed in the field. Options include polished brass front flanges (BFF), black painted steel front flanges (BLFF), chrome front flanges (CFF), polished stainless steel front flanges (SSFF), chrome triangular bezel front flanges with U-clamp (CB-U), black painted steel triangular bezels with U-clamp (BB-U-Clamp), polished stainless steel narrow bezel front flanges (SSB-U), and panel mount clamps (PMC). Chrome plated steel adapter rings (AR) are available in conjunction with several of these flanges to adapt to oversized panel cut outs. A selection of flange rings are also offered: polished stainless steel flange rings (SSFR), chrome plated steel flange rings (CFR), and black or chrome panel mount rings (BPMR & CPMR). Brass rear flanges (BRF) and black rear flanges (BLRF) for front of panel mounting are also available on some models. Rear Flanges are a factory installed option.

CASES AND COVER RINGS

Black painted steel (BCR), chrome plated steel (CCR) and 304 stainless steel (SSCR) cases and cover rings are available on many models as production options.

LENSES

Instrument glass lenses, laminated safety glass lenses, plexiglass lenses, and homalite lenses (resistant to many industrial solvents) are available on many models. NOTE: A steel or stainless steel case and cover ring is required when other than plexiglass lenses are utilized. Some models are also available with a solid front, safety case configuration as a production option.

*For further warranty information please consult your specific product catalogs.

PRESSURE GAUGE ACCESSORIES & OPTIONS

MAXIMUM INDICATING POINTERS



MAXIMUM INDICATING POINTERS (MIP) are an invaluable tool for identifying pressure spikes in a system. They are very helpful during system start up and trouble shooting. MIPs add an additional $\pm 1\%$ error to the gauge because of the increased load on the bourdon tube. On ranges of 60 psi and lower, MIPs may double the allowed error of the gauge.

SET POINTERS (SP) are used to identify an operating minimum or maximum pressure or vacuum value. Set pointers are available on most 100 Series gauges.

SET POINTERS



RUBBER CASE PROTECTORS (RCP)

Rubber case protectors (RCP) are ideal for gauges that are subjected to direct physical shock. 2-1/2" covers are blue and 4" covers are black.

RUBBER CASE PROTECTORS



ORIFICES

Press-fit brass orifices or threaded 316 stainless steel orifices are available on all NOSHOK pressure gauges. They are standard with .012" I.D or .032" I.D, depending on the model. Orifices are used in a gauge to restrict the flow of rapidly increasing and decreasing pressures, thereby lessening the immediate effect of pulsations and pressure spikes. Orifices are recommended for all dynamic applications.

RECALIBRATORS

The option of an adjustment screw accessible through the dial facilitates re-setting the zero point without disassembling the gauge.

OVER PRESSURE PROTECTION

Over pressure protection of up to 200% of the dial range is available on some models as a production option.

AMMONIA REFRIGERATION GAUGES

Ammonia refrigeration gauges with dials reading in both pressure and temperature are available in 400/500 Series 2-1/2 and 4" sizes.

LIQUID FILLING OPTIONS

Many NOSHOK gauges are available with liquid filling options. Our standard fill is glycerine and water; however, optional fill liquids include Dow Corning 200 silicone and halocarbon.

SPECIAL CONNECTIONS

Special connections are available on most NOSHOK gauges. Some examples include: metric threads, female threads, straight threads (flare or swivel type) and special O-ring connections. Please contact us with your requirements for prices, availability and minimum quantities.

REID VAPOR TEST GAUGES

A Reid Vapor test gauge configuration which includes a handle, special dial and special pressure part is available in 600/700 Series gauges with pressure ranges of 0-5 psi, 0-15 psi and 0-30 psi.

RECEIVER GAUGES

3-15 psi receiver gauges are available in both 600 Series (Brass) and 700 Series (316 stainless steel) configurations.

METRIC DIALS AND CUSTOMIZED SPECIAL DIALS

Dual scale Metric Dials in psi/bar, psi/kPa and psi/kg/cm² are available on many models. Certain other scales are available for specific sizes and ranges, such as single scale bar and kPa, refrigerant scales and altitude scales. Please consult the factory for availability. Special Dials such as non-standard metric scale, tons of ram, lbs. of force, etc. are available in small quantities (as few as one piece) on some models.

CERTIFIED CALIBRATION

Certified calibration is available on all NOSHOK gauges. Certified calibration provides the user with a serial numbered gauge along with a calibration sheet against a primary pressure standard and is traceable to the National Institute of Standards and Technology.

AMMONIA REFRIGERATION GAUGES



[†]For further warranty information please consult your specific product catalogs.

DIFFERENTIAL PRESSURE GAUGES

SPECIFICATIONS

SIZES: 2-1/2" and 4-1/2"

CASE MATERIAL: Fiberglass reinforced plastic – STD

LENS: Acrylic – STD; Laminated safety glass – Opt.; Acrylic w/ MIP – optional

SENSOR HOUSING MATERIAL: Aluminum, black – STD; 316L stainless steel – optional

PROCESS CONNECTION: 1/4"E F-F NPT, back connection – STD;

Other 1/4"E F-F NPT with back or side connections available

ACCURACY: ±2% Full scale on rising pressure

RANGES: 0 psid to 5 psid through 0 psid to 100 psid

OPTIONAL FILL FLUIDS: Glycerine, Silicone or Halocarbon

OPERATING LIMITATIONS:

TEMPERATURE: -40 °F to 200 °F (-40 °C to 93 °C)

MAXIMUM WORKING STATIC

PRESSURE: 6,000 psig



1000 SERIES

NOSHOK PISTON TYPE DIFFERENTIAL GAUGES are designed for measuring pressure drop across filters, strainers, separators and valves. The single piece construction of the ceramic magnet/piston is designed to reduce "blow by" and increase gauge accuracy. These gauges can be found in applications requiring high differential pressure from 0 to 5 psid to 0 to 100 psid with maximum working/static pressure to 6,000 psig.

WARRANTY: 1000 Series (dry): One Year[†]

1000 Series (liquid filled): Three Years[†]

SPECIFICATIONS

SIZES: 2-1/2" and 4-1/2"

CASE MATERIAL: Fiberglass reinforced plastic – STD.

LENS: Acrylic – STD; Laminated safety glass – Opt.; acrylic w/ MIP – Opt.

SENSOR HOUSING MATERIAL: Aluminum, black – STD;

316L stainless steel – Opt. Brass – Opt.

PROCESS CONNECTION: 1/4"E F-F NPT, back connection – STD;

Other 1/4"E F-F NPT with top and bottom connections available

ACCURACY: ±2% Full scale on for ranges 0 to 15 psid and above;

±5% Full scale for ranges below 0 to 15 psid

RANGES: 0 inH₂O to 50 inH₂O through 0 psid to

100 psid

OPTIONAL FILL FLUIDS: Glycerine, Silicone or Halocarbon

OPERATING LIMITATIONS:

TEMPERATURE: -40 °F to 200 °F (-40 °C to 93 °C)

MAXIMUM WORKING STATIC

PRESSURE: 3,000 psig - stainless steel and aluminum,

and 1,500 psig - brass



1100 SERIES

NOSHOK DIAPHRAGM TYPE DIFFERENTIAL GAUGES are designed for applications where higher levels of solids are present in the measuring media. The magnetic piston and polymeric diaphragm are utilized to measure the low to high differential pressure. The isolation of the high and low inlets prevents fluid movement between the ports. They are used in measuring pressure drops across filters, strainers, separators, heat exchangers and more.

WARRANTY: 1100 Series (dry): One Year[†]

1100 Series (liquid filled): Three Years[†]

SPECIFICATIONS

SIZES: 4-1/2" and 6"

CASE MATERIAL: Aluminum, black – STD; 316L stainless steel – Optional

LENS: acrylic – STD; laminated safety glass

SENSOR HOUSING MATERIAL: 316L stainless steel – STD

PROCESS CONNECTION: 1/4" F-F NPT, back connection – STD; Other 1/4" F-F NPT with dual top and bottom connection available

ACCURACY: ±1% Full scale on rising pressure

RANGES: 0 to 100 inH₂O through 0 to 600 psid

OPTIONAL FILL FLUIDS: Glycerine, Silicone or Halocarbon

OPERATING LIMITATIONS:

TEMPERATURE: -40 °F to 200 °F (-40 °C to 93 °C)

MAXIMUM WORKING STATIC

PRESSURE: 3,000 psig



1200 SERIES

NOSHOK MEMBRANE TYPE HIGH STATIC DIFFERENTIAL PRESSURE GAUGES are designed for applications requiring high static pressure and high differential pressure measurement. Utilizing opposing Monel membranes, halocarbon fill and a bi-directional overpressure valve these gauges are suited for applications in hydraulic and pneumatic systems, filters, flow indicators and caustic liquid or gaseous media. A liquid filled case is available to dampen the effects of pulsation, vibration and shock.

WARRANTY: 1200 Series (dry): One Year[†]

1200 Series (liquid filled): Three Years[†]

SPECIFICATIONS

SIZES: 4-1/2" and 6"

CASE MATERIAL: Aluminum, black – STD; 316L stainless steel – Optional

LENS: Acrylic – STD; Laminated safety glass

SENSOR HOUSING MATERIAL: 316L stainless steel – STD

PROCESS CONNECTION: 1/4"E F-F NPT, dual top and bottom connection – STD; Other 1/4" F-F NPT with back connection available

ACCURACY: ±1% Full scale on rising pressure

RANGES: 0 to 100 inH₂O through 0 to 400 psid

OPTIONAL FILL FLUIDS: Glycerine, Silicone or Halocarbon

OPERATING LIMITATIONS:

TEMPERATURE: -40 °F to 200 °F (-40 °C to 93 °C)

MAXIMUM WORKING STATIC

PRESSURE: 600 psig



1300 SERIES

NOSHOK MEMBRANE TYPE NOMINAL STATIC DIFFERENTIAL PRESSURE GAUGES are designed for integral process applications requiring nominal static and low differential pressure measurement. The black anodized aluminum case and 316L stainless steel sensor housing combine to form a durable case construction with NEMA 4X rating. These gauges are suited for application in caustic liquid or gaseous media and/or low temperature gases, water treatment systems, filters, strainers, pumps and more.

WARRANTY: 1300 Series (dry): One Year[†]

1300 Series (liquid filled): Three Years[†]



SPECIFICATIONS

DISPLAY: 0.4" LCD
DIGITS: 4, from -1999 to 9999
ACCURACY: $\pm 0.2\%$ Full scale, ± 1 digit
UPDATE RATE: 5 times/sec
RANGE: The 4 mA to 20 mA signal from the transmitter can be assigned any display value within the display range
POWER: Loop-powered; No additional power supply required; Maximum current rating is 40 mA and voltage drop of 3 Vdc
 CE Compliant to EMC norm EN61326:1997/A1:1998 RFI, EMI, ESD protection; NEMA 4X to EN60529/IEC529



1800 SERIES

NOSHOK ATTACHABLE LOOP-POWERED DIGITAL INDICATORS utilize a transmitters' 4mA to 20mA output signal and the Hirschmann connector for local pressure indication. It is simply inserted between the transmitter body and the connector without the need for additional wiring or power source. The indicator is programmable to display a range of -1999 to 9999 and may be tilted for better viewing. There is a user selectable digital filtering to improve readability in rapidly varying pressure pulsations. Available with optional relay that is programmable through the front of the meter.

WARRANTY: One Year[†]

SPECIFICATIONS

DISPLAY: 3-1/2" digit LCD from -1999 to 1999
INPUT SIGNAL: Current: 4 mA to 20 mA
SPAN RANGE: 0 to 1999
OFFSET RANGE: -1999 to 1999
LINEARITY: $\pm 0.1\%$ to 1 digit
READING RATE: 2.5 readings per second, nominal
RESPONSE TIME: 1.5 seconds to settle for a step change
 CE Compliant to EMC norm EN61326:1997/A1:1998 RFI, EMI, ESD protection; NEMA 4X to EN60529/IEC529



1900C SERIES

NOSHOK COMPACT LOOP-POWERED DIGITAL INDICATORS provide digital display of any desired unit of pressure, temperature, level, and force or flow measurement. Their 3-1/2" digit display has a span range of 0 to 1999 and is available in a positive image reflective LCD or in an optional red or yellow/green back-lit version.

WARRANTY: One Year[†]

SPECIFICATIONS

ENCLOSURE: Black painted steel or off-white fiberglass optional
DISPLAY: 5 digit, 0.48" high (-9999 to 99999) LCD
INPUT SIGNAL: Current: 4 mA to 20 mA
 Voltage: 0 Vdc to 10 Vdc; Resistance: 100 ohm pt
POWER REQUIREMENT: 9 Vdc to 28 Vdc (optional power supply available for 85 Vac to 250 Vac excitation)
ELECTRICAL CONNECTIONS: Terminal block in rear, recommended wire: 30 to 14 AWG copper
OPTIONAL POWER SUPPLIES: 115 Vac to 12 Vdc (400 mA); 115 Vac to 24 Vdc (200 mA); or 115 Vac to 12 Vdc (80 mA)
 CE Compliant to EMC norm EN61326:1997/A1:1998 RFI, EMI, ESD protection; NEMA 4X to EN60529/IEC529



1950 SERIES

NOSHOK COMPACT SMART SYSTEM DIGITAL INDICATORS offer all the features of a full size panel meter compressed into a small design for ease of installation in almost any application. The 5 digit display has a span range of -9999 to 99999 and is available in reflective LCD and selectable red or green backlit versions. The display can accept a variety of process signals for applications in pressure, flow, level, force and temperature. All programming can be done easily through the front of the meter. The display is fully expandable to accommodate applications requiring relays, dual sinking outputs, and serial communications by RS232 or RS485. NOSHOK calibrates all of its indicators to your transducer requirements at no additional cost. Simply tell us how you want it set up, then plug it in and go!

WARRANTY: One Year[†]

SPECIFICATIONS

INPUT SIGNALS: Current, voltage or resistance
POWER REQUIREMENTS: 115/230 Vac or 11 Vdc to 36 Vdc
INTERNAL POWER SUPPLY: 24 Vdc
ELECTRICAL CONNECTION: Terminal blocks in rear
UPDATE RATE: Up to 20 times per second adjustable (Up to 105 times per second, adjustable for 2100 Series)
LINEARIZATION: 16 point scaling of non linear input
ACCURACY: $\pm 0.03\%$ of reading +3 μ A for 4 mA to 20 mA input;
 $\pm 0.03\%$ of reading +3 mV for 0 to 5 Vdc and 0 Vdc to 10 Vdc inputs over the range of 18 °C to 28 °C
 CE Compliant to EMC norm EN61326:1997/A1:1998 RFI, EMI, ESD protection; NEMA 4X/IP65 sealed bezel only



2000/2100 SERIES

NOSHOK SMART SYSTEM "INTELLIGENT" DIGITAL INDICATORS are field upgradeable digital process indicators with single or dual input which suit a wide range of indication and control requirements. They can accept a variety of standard process signals and precisely scale them into any desired unit of measure. The indicator employs advanced technology for stable, drift free readout, while incorporating added features such as an optional analog output card, dual or quad relay cards or serial communication cards. The easy menu driven programming or available PC software allows the user to quickly and easily set system configurations.

WARRANTY: One Year[†]

[†]For further warranty information please consult your specific product catalogs.

PRESSURE AND LEVEL TRANSMITTERS AND TRANSDUCERS

SPECIFICATIONS

OUTPUT SIGNAL: 4 mA to 20 mA, 2-wire
RANGES: STD gauge ranges from vacuum to 15,000 psi; absolute ranges also available
ACCURACY: $\pm 0.5\%$ Full scale (B.F.S.L.); $\pm 1.0\%$ Terminal Point; Optional $\pm 0.25\%$ Full scale (B.F.S.L.), $\pm 0.5\%$ Terminal Point
HOUSING MATERIAL: 316 stainless steel
POWER SUPPLY: 10 Vdc to 30 Vdc, unregulated
ADJUSTMENT: $\pm 10\%$ for zero and span

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD protection
IP65, NEMA 4X to EN 60529/IEC 529



100 SERIES



NOSHOK CURRENT OUTPUT PRESSURE TRANSMITTERS

are designed utilizing advanced diffused semiconductor and proven sputtered thin film sensor technology for maximum stability. They are highly repeatable, shock resistant and extremely stable over long periods of time. CE compliance, which includes substantial levels of RFI, EMI and ESD protection combined with reverse polarity and over-voltage protection, ensures that these transmitters perform well in the most demanding applications.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 0 to 5 Vdc, 0 to 10 Vdc, 1 to 5 Vdc, 1 to 6 Vdc & 1 to 11 Vdc, 3-wire
RANGES: STD gauge ranges from vacuum to 15,000 psi; absolute ranges also available
ACCURACY: $\pm 0.5\%$ Full scale (B.F.S.L.); $\pm 1.0\%$ Terminal Point; Optional $\pm 0.25\%$ Full scale (B.F.S.L.), $\pm 0.5\%$ Terminal Point
HOUSING MATERIAL: 316 stainless steel
POWER SUPPLY: 10 Vdc to 30 Vdc, 14 Vdc to 30 Vdc for 1 Vdc to 11 Vdc & 0 Vdc to 10 Vdc, unregulated;
ADJUSTMENT: $\pm 10\%$ for zero and span

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD protection
IP65, NEMA 4X to EN 60529/IEC 529



200 SERIES



NOSHOK VOLTAGE OUTPUT PRESSURE TRANSDUCERS

are highly repeatable, shock resistant and extremely stable over long periods of time. Utilizing advanced diffused semiconductor and proven sputtered thin film sensor technology they are highly accurate and stable. CE compliant.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc, 3-wire; 1 Vdc to 5 Vdc, 3-wire; 0 Vdc to 10 Vdc, 3-wire; .5 Vdc to 4.5 Vdc ratiometric, 3-wire
RANGES: Standard from 0 psig to 15 psig; through 0 psig to 10,000 psig, standard absolute ranges 15 psig through 200 psig
ACCURACY: $\pm 0.5\%$ Full scale (B.F.S.L.); $\pm 1.0\%$ Terminal Point; Optional $\pm 0.25\%$ Full scale (B.F.S.L.), $\pm 0.5\%$ Terminal Point
HOUSING MATERIAL: 316L stainless steel
POWER SUPPLY: 8 Vdc to 30 Vdc unregulated for 4 mA to 20 mA output, 8 Vdc to 30 Vdc for 0 Vdc to 5 Vdc output; 14 Vdc to 30 Vdc for 0 Vdc to 10 Vdc output; 5 Vdc $\pm 10\%$ Vdc for 0.5 Vdc to 4.5 Vdc output ratiometric

CE compliant to EMC norm EN 61326: 1997/A1 1998
RoHS Compliant



300 SERIES



NOSHOK COMPACT OEM PRESSURE TRANSDUCERS' rugged, compact design delivers solid durability and long term stability during operation. Engineered for use in general industrial applications, it features technical specifications exceeding those of competitors' transducers costing much more. A wide variety of electrical and mechanical connections are available for easy installation into most applications, along with most popular analog output signals. All electrical components carry a high degree of EMC protection compliant with EN 61326, which makes it ideal for areas where RFI, EMI or ESD signals are present. Its high quality stainless steel construction is compatible with chemically aggressive media. The sensor is welded directly to the process connection, eliminating the need for gaskets or seals while also increasing its resistance to mechanical stress.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire & 0 to 5 Vdc, 0 to 10 Vdc, 0.5 to 2.5 Vdc, 3-wire
RANGES: 0 to 50 inH₂O through 0 to 1000 psi
CABLE: Durable high performance Polyurethane jacketed cable enhances reliability; Teflon and Water-blocked PVC cable optional
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
HOUSING MATERIAL: 316 stainless steel
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for 0 Vdc to 10 Vdc; 5 Vdc to 30 Vdc for 0.5 Vdc to 2.5 Vdc

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD protection
IP68, NEMA 6P



612 SERIES



NOSHOK SUBMERSIBLE LEVEL TRANSMITTERS offer a previously unequalled level of performance. Utilizing diffused semiconductor and proven sputtered thin film sensor technology they are highly accurate, shock resistant and extremely stable for long periods of time. Reverse polarity protection and short circuit protection have been installed as standard features. Lightning protection is optional.

WARRANTY: Three Years[†]

[†]For further warranty information please consult your specific product catalogs.

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 to 5 Vdc, 0 to 10 Vdc, 1 to 5 Vdc, 1 to 6 Vdc & 1 to 11 Vdc, 3-wire
RANGES: STD gauge ranges from vacuum to 145,000 psi; absolute ranges also available
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for Voltage Output
ADJUSTMENT: $\pm 10\%$ for zero and span

CE compliant to EMC norm EN 61326: 1997/A1
 1998 RFI, EMI and ESD protection IP65, NEMA 4X
 to EN 60529/IEC 529



615/616 SERIES



NOSHOK HIGH ACCURACY HEAVY DUTY PRESSURE TRANSDUCERS are designed for heavy duty applications requiring high accuracy and durability. Utilizing advanced diffused semiconductor and proven sputtered thin film sensor technology they are stable, accurate, shock resistant and extremely durable. The durability is coupled with the mechanical integrity of the case, process connection, and wetted parts constructed of corrosion-resistant stainless steel.

WARRANTY: Three Years*

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA or 1 Vdc to 5 Vdc or 0.5 Vdc to 4.5 Vdc Low Power Outputs
RANGES: From vacuum to 15,000 psi-gauge, compound or absolute
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point
CONNECTION: 1/2" NPT male conduit electrical connection
POWER SUPPLY: 10 Vdc to 30 Vdc unregulated for 4 mA to 20 mA output, 6 Vdc to 30 Vdc for 1 Vdc to 5 Vdc low power and 0.5 Vdc to 4.5 Vdc low power (≤ 2 mA for power supply ≤ 12 Vdc) output

FM and CSA approved; XP / Class I / Division 1 / Groups A, B, C and D; DIP / Class II and III / Division 1 / Groups E, F and G

CE compliant to EMC norm EN 61326: 1997/A1
 1998 RFI, EMI and ESD protection / ANSI/ISA-12.27.01-2003 approved single seal



HAZARDOUS LOCATION PRESSURE TRANSMITTERS

621/622 SERIES



NOSHOK EXPLOSION-PROOF PRESSURE TRANSMITTERS are designed for applications that require pressure measurement in hazardous environments. They combine proven sputtered thin film sensor technology or the reliable, long life diffused semiconductor with safe electronics to provide outstanding performance and value in a hazardous location transmitter. All wetted parts are made of stainless steel and Elgiloy welded with no internal O-rings, gaskets or seals.

619/620 Series available with ATEX Approval.

WARRANTY: Three Years*

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA or 1 Vdc to 5 Vdc or 0.5 Vdc to 4.5 Vdc Low Power Outputs
RANGES: From vacuum to 15,000 psi-gauge, compound or absolute
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc unregulated for 4 mA to 20 mA; 6 Vdc to 30 Vdc for 1 Vdc to 5 Vdc, and 0.5 Vdc to 4.5 Vdc output

FM and CSA approved; NI / Class I / Division 2 / Groups A, B, C, DIP; Class II / Division 1 / Groups E, F and G

CE compliant to EMC norm EN 61326: 1997/A1
 1998 RFI, EMI and ESD protection / ANSI/ISA-12.27.01-2003 approved single seal



HAZARDOUS LOCATION PRESSURE TRANSMITTERS

623/624 SERIES



NOSHOK NON-INCENDIVE PRESSURE TRANSMITTERS combine advanced diffused semiconductor and proven sputtered thin film sensor technology with safe electronics for outstanding performance and value in a hazardous environment pressure transmitter. The wetted parts are made of stainless steel and a welded pressure chamber with no internal O-rings, gaskets or seals.

WARRANTY: Three Years*

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire output signal
RANGES: From vacuum to 60,000 psi-gauge, compound or absolute
WETTED PARTS: Constructed of stainless steel (Hastelloy C4 optional on front flush), welded with no internal O-rings, gaskets or seals
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc unregulated, Minimum voltage across transmitter connections is 10 Vdc

FM and CSA approved; IS / Class I, II and III / Division 1 / Groups A, B, C, D, E, F and G; Class I / Zone 0 / AEx ia / Group IIC; DIP / Class II and III / Division 2 / Groups F and G; NI / Class I / Division 2 / Groups A, B, C and D

CE compliant to EMC norm EN 61326: 1997/A1
 1998 RFI, EMI and ESD protection / ANSI/ISA-12.27.01-2003 approved single seal



HAZARDOUS LOCATION PRESSURE TRANSMITTERS

625/626 SERIES



NOSHOK INTRINSICALLY SAFE PRESSURE TRANSMITTERS combine the reliability and long life of diffused semiconductor and proven sputtered thin film sensor technology with safe electronics for outstanding performance and value. These transmitters were designed for applications that require pressure measurement in hazardous locations. They are available in a wide variety of pressure connections, ranges and electrical connections to suit most applications.

WARRANTY: Three Years*

*For further warranty information please consult your specific product catalogs.

PRESSURE AND LEVEL TRANSMITTERS & TRANSDUCERS

HAZARDOUS LOCATION PRESSURE TRANSMITTERS

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire output signal
RANGES: From 50 inH₂O to 350 psig
CABLE: Durable high performance Polyurethane jacketed cable enhances reliability; Teflon cable optional
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.), $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point for ≥ 150 in H₂O only
POWER SUPPLY: 10 Vdc to 30 Vdc unregulated

CE Compliant to EMC norm EN 61326; 1997/A1 1998
RFI, EMI and ESD

FM and CSA approved; IS / Class I, II and III / Division 1 / Groups A, B, C, D, E, F and G; Class I / Zone 0 / AEx ia / Group IIC; DIP / Class II and III / Division 2 / Groups F and G; NI / Class I / Division 2 / Groups A, B, C and D



627 SERIES

NOSHOK INTRINSICALLY SAFE SUBMERSIBLE LEVEL TRANSMITTERS combine the reliability and long life of diffused semiconductor or proven sputtered thin film strain gage sensors with safe electronics to provide outstanding performance and value in a liquid level transmitter designed for hazardous environments. They are available with a stainless steel nosecone, weighted stainless steel nosecone or NPT adapter and ranges to suit most applications.

WARRANTY: Three Years[†]



SPECIFICATIONS

OUTPUT SIGNALS: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 3-wire; 0.5 Vdc to 4.5 Vdc, 3-wire ratio-metric
RANGES: Vacuum and compound through 300 psi
ACCURACY: $\pm 0.5\%$ Full scale (B.F.S.L.)
HOUSING MATERIAL: Copper alloy with Polyamid cap
POWER SUPPLY: 9 Vdc to 30 Vdc for 0 Vdc to 5 Vdc & 1 Vdc to 5 Vdc; 12 Vdc to 30 Vdc for 0 Vdc to 10 Vdc; 5 Vdc $\pm 10\%$ for 0.5 Vdc to 4.5 Vdc

CE compliant to EMC norm EN 61326: 1997/A1 1998 RFI, EMI and ESD protection IP67, NEMA 4X to EN 60529/IEC 529



630 SERIES

NOSHOK HALL EFFECT TRANSDUCERS utilize a proven Hall Effect sensor to provide excellent performance and reliability at an economical price. The nearly frictionless transduction method provides exceptional repeatability and long service life.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire & 0 to 5 Vdc, 0 Vdc to 10 Vdc, 0.5 to 2.5 Vdc, 3-wire, RS232
RANGES: STD gauge ranges from vacuum to 15,000 psi; absolute ranges also available
ACCURACY: $\pm 0.05\%$ Full scale (B.F.S.L.); $\pm 0.1\%$ Terminal Point; Optional $\pm 0.025\%$ Full scale (B.F.S.L.), $\pm 0.05\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for 0 Vdc to 10 Vdc Output; Voltage supply from interface RS232-C

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD IP65, NEMA 4X (IEC 529)



640 SERIES

NOSHOK PRECISION HEAVY DUTY PRESSURE TRANSDUCERS WITH SERIAL INTERFACE have been designed for industrial and laboratory applications requiring high accuracy and repeatability with excellent compensation for temperature.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire; 0 to 10 Vdc, 1 to 5 Vdc, 3-wire; 0.5 Vdc to 4.5 Vdc, 3-wire ratio-metric
RANGES: 0 to 100 psig to 0 to 8,000 psig
ACCURACY: $\pm 0.5\%$ Full scale (B.F.S.L.) $\pm 1.0\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 36 Vdc for 4 mA to 20 mA & 1 Vdc to 5 Vdc; 14 Vdc to 36 Vdc for 0 Vdc to 10 Vdc; 5 Vdc $\pm 0.5\%$ for 0.5 Vdc to 4.5 Vdc

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD



650 SERIES

NOSHOK HIGH VOLUME OEM PRESSURE TRANSDUCERS combine high performance with off road vehicle reliability under severe process and environmental conditions. They are designed to handle high pressure spikes and process pulsation. Utilize advanced diffused semiconductor and proven sputtered thin film sensor technology for maximum stability.

WARRANTY: Three Years[†]

[†]For further warranty information please consult your specific product catalogs.

SPECIFICATIONS

OUTPUT SIGNAL: 4 mA to 20 mA 2-wire, 1 Vdc to 5 Vdc, and 0.1 Vdc to 10 Vdc 3-wire
RANGES: Standard ranges from 200 psig to 15,000 psig
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for 4 mA to 20 mA; 14 Vdc to 30 Vdc for 1 Vdc to 5 Vdc, & 0.1 Vdc to 10 Vdc 3-wire

CE compliant to EMC norm EN 61326: 1997/A1 1998
 RFI, EMI and ESD IP65, NEMA 4X (IEC 529)



660 SERIES



NOSHOK MICRO-SIZE PRESSURE TRANSDUCERS are designed with high overpressure capability to provide long service life and reliability in hydraulic and pneumatic applications containing process pulsations and high vibration. Utilizes proven sputtered thin film sensor technology for maximum stability and accuracy.

WARRANTY: Three Years†

SPECIFICATIONS

OUTPUT SIGNAL: 4 mA to 20 mA, 2-wire
RANGES: STD gauge ranges from vacuum through 15,000 psig
ACCURACY: $\pm 0.05\%$ Full scale (B.F.S.L.); $\pm 0.1\%$ Terminal Point; $\pm 0.15\%$ Full scale (B.F.S.L.) for 0 to 15,000 psig range; $\pm 0.3\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc, unregulated
 • Built in process temperature display
 • Built in selectable process digital filtering
 • 32 point process linearization

CE compliant to EMC norm EN 61326: 1997/A1 1998 RFI, EMI and ESD



755/756 SERIES



NOSHOK DIGITAL PRESSURE TRANSMITTERS combine advanced diffused semiconductor and proven sputtered thin film sensor technology with digital electronics for outstanding performance and value. They offer maximum flexibility with up to 20:1 span turn down and -2.5 to 99% zero adjustment.

WARRANTY: Three Years†

PRESSURE SWITCHES

SPECIFICATIONS

CASE: Brass standard, stainless steel optional
MEASURING ELEMENT: NBR Diaphragm standard – Viton®, EPDM optional
SWITCHING FUNCTION: 1 SPST N.O. or 1 N.C.
ADJUSTMENT: Adjustment screw from 5 psig to 150 psig depending on Full scale range
AVAILABLE RANGES: 0 psig to 30 psig through 0 psig to 150 psig
CONNECTION: 1/8" NPT, male
ELECTRICAL CONNECTION: 6.3mm spade terminals
MEDIA TEMPERATURE: -13 °F to 185 °F (-25 °C to 85 °C)



100 SERIES

NOSHOK MECHANICAL MINIATURE LOW-PRESSURE SWITCHES are constructed of a solid one-piece housing, making them highly durable for use in the most rugged applications. The compact design allows it to be installed where space is limited. These switches utilize a proven diaphragm-type sensing element, and have an external adjustment screw for ease of setting the switching point on-site. Special versions are available with the alternate diaphragm, housing and contact materials to meet most current requirements. 100 Series is the ideal choice when reliability, accuracy and cost efficiency are a priority.

WARRANTY: One Year†

SPECIFICATIONS

CASE: Zinc-plated steel
MEASURING ELEMENT: NBR diaphragm < 225 psig; Steel piston with NBR seal > 225 psig
SWITCHING FUNCTION: SPDT, micro switch with silver plated contacts, gold plated contacts available on request
ADJUSTMENT: Adjustment screw from 3 psig to 4600 psig depending on Full scale range
AVAILABLE RANGES: 3 psig to 30 psig through 450 psig to 4600 psig
CONNECTION: 1/4" NPT standard, others available on request
ELECTRICAL CONNECTION: 6.3mm spade terminals
MEDIA TEMPERATURE: -4 °F to 176 °F (-20 °C to 80 °C)



200 SERIES



NOSHOK MECHANICAL COMPACT SPDT PRESSURE SWITCHES operate using a high quality diaphragm or piston element to open or close a micro switch, and provide maximum versatility, excellent repeatability and superior contact ratings. These compact-sized switches have a frequency of 100 cycles per minute, and switching repeatability of $\pm 2.0\%$. They also feature superior contact ratings: AC up to 250 V - 4 A, and DC up to 28 V - 2 A, and are RoHS compliant. This switch features an SPDT (single changeover) contact configuration. Ranges are available from 3 psig to 30 psig through 450 psig to 4600 psig, and an external adjustment screw allows for ease of setting the switching point on-site. Available in special versions with stainless steel or brass housing and gold contacts for low switching currents

WARRANTY: One Year†

†For further warranty information please consult your specific product catalogs.

PRESSURE SWITCHES AND SWITCH/TRANSMITTERS

SPECIFICATIONS

CASE: Zinc plated steel

MEASURING ELEMENT: NBR diaphragm < 225 psig;

Steel piston with NBR seal > 225 psig

SWITCHING FUNCTION: SPDT, micro switch with silver plated contacts, gold plated contacts available on request

ADJUSTMENT: Adjustment screw from 3 psig to 4600 psig depending on Full scale range

AVAILABLE RANGES: 3 psig to 30 psig through 450 psig to 4600 psig

CONNECTION: 1/4" NPT standard, others available on request

ELECTRICAL CONNECTION: Hirschmann (DIN EN 175301-803)

MEDIA TEMPERATURE: -4 °F to 176 °F (-20 °C to 80 °C)



300 SERIES



NOSHOK MECHANICAL COMPACT SPDT PRESSURE SWITCHES WITH ADJUSTABLE HYSTERESIS are constructed with a rugged zinc plated steel housing and process connection, and provide adjustable hysteresis (10-30% of switch point). Utilizing a proven diaphragm or piston type sensing technology, it provides excellent reliability, repeatability, and affordability for use in many applications. The micro switch contacts are silver plated for extended service life and exceptional dependability. Switching functions are field adjustable, while under pressure, and it features an SPDT single changeover contact configuration. These switches are RoHS compliant.

WARRANTY: One Year*

SPECIFICATIONS

CASE: Zinc-plated steel

WETTED PARTS: Zinc-plated steel; NBR diaphragm

<230 psig, Stainless steel piston with NBR seal >500 psig

CONNECTION: 1/4" NPT and 7/16-20 SAE – STD

ELECTRICAL CONNECTION: Hirschmann (DIN 43650 A)

REPEATABILITY: ±2% Full scale

AVAILABLE RANGES: 0 psig to 300 psig through

0 psig to 5,000 psig

SWITCHING FUNCTIONS: SPDT, micro-switch with silver-plated contacts

CE Compliant to EMC norm 61326: 1997/A1 1998 RFI, EMI and ESD



400 SERIES



NOSHOK MECHANICAL HEAVY-DUTY PRESSURE SWITCHES provide excellent repeatability and features a robust design for applications requiring maximum accuracy under extreme loads. With a switching point setting that remains stable for years, this switch converts pneumatic and hydraulic pressure into switching functions, and depending on the type of connection, it can easily be used as a N.C., N.O. or SPDT contact. The switching point is fully adjustable and includes a locking mechanism. This switch is fitted with 43650 DIN connectors for fast and easy installation. It is also available with a socket with an LED for easier switch point adjustment and visual status indication, or without the socket and an M12 x 1 electrical connection.

WARRANTY: One Year*

SPECIFICATIONS

CASE: Brass through 350 psi; aluminum 600 psi and higher

WETTED PARTS: Copper alloy; 316 stainless steel above 600 psi

CONNECTION: 1/4" NPT, brass

ELECTRICAL CONNECTION: M12 x 1 (4-Pin)

REPEATABILITY: ≤1% Full scale

AVAILABLE RANGES: Vacuum through 0 to 15,000 psi

SWITCHING FUNCTIONS: 1 N.O. or 1 N.C. contact standard, 2 N.O. or 2 N.C. contacts are optional, p-switching or n-switching

CE compliant to EMC norm EN 61326: 1997/A1 1998 RFI, EMI and ESD



500 SERIES



NOSHOK ELECTRONIC MAG-SWITCHES are electronic pressure switches that utilize proven diaphragm pressure sensing technology coupled with Hall Effect magnetic field sensing technology and semiconductor switching technology to provide a highly reliable, accurate, repeatable pressure switch without mechanical contacts. The standard electrical connection is a 4-pin M12 X 1 threaded connector which carries a NEMA 4: IP65 (IEC529) rating.

WARRANTY: Three Years*

SPECIFICATIONS

CASE: Series 800 - stainless steel, Series 810 – black anodized aluminum

WETTED PARTS: Stainless steel with ceramic sensor and Viton® seal on ranges through 0 psig to 230 psig (other sealing materials available); stainless steel only for higher pressure ranges.

CONNECTION: 1/4" NPT standard, other options available

ELECTRICAL CONNECTION: M12 x 1 (4-Pin)

ACCURACY: <0.5% Full scale (B.F.S.L.)

AVAILABLE RANGES: Standard -14.5 psig to 30 psig through 0 psig to 9999 psig

SWITCHING FUNCTIONS: 1 or 2 N.O. or N.C. (PNP or NPN)

POWER SUPPLY: 12 Vdc to 30 Vdc

ANALOG OUTPUT: 4 mA to 20 mA or 0 Vdc to 10 Vdc; programmable and freely adjustable

CE compliant to EMC norm EN 61326: 1997/A1 1998 RFI, EMI and ESD



800/810 SERIES



NOSHOK'S ELECTRONIC INDICATING PRESSURE TRANSMITTER/SWITCHES are available with 2 switching outputs, 1 switching output and 1 analog output (4–20 mA or 0–10 V), or 2 switching outputs and 1 analog output (4–20 mA). These pressure switch/transmitters provide continuous pressure monitoring and allow the programming of set points without pressurizing. Two buttons allow easy adjustment of the set points, contact functions (normally open/normally closed), reset points, contact types (npn/pnp) and switching function (hysteresis/gate). Other features include integrated password protection, and a higher maximum pressure than anything comparable on the market (9999 psi). The 800/810's convenient 330° rotatable indicator head and optional turntable process connection provide ease of installation and wiring.

WARRANTY: Three Years*

*For further warranty information please consult your specific product catalogs.

SANITARY PRESSURE INSTRUMENTS

CAUTION: NOSHOK pressure transmitters are not to be used in heat sterilization systems as stated in 3A Standard 74-03 paragraph D10.1.2. Diaphragm seal must be installed facing downward or in a vertical position for drainability. Do not install diaphragm seal facing in an upward position.

SPECIFICATIONS

SIZE: 2"
CASE MATERIAL: 304 stainless steel
COVER RING: 304 stainless steel
LENS: Polycarbonate – STD; safety glass – Optional
BOURDON TUBE: 316 stainless steel
ACCURACY: $\pm 2.5\%$ Full scale
PROCESS CONNECTION: 3/4" clamped-style
SEAL HOUSING: 316L stainless steel
DIAPHRAGM MATERIAL: 316L stainless steel
SEAL FILL: Glycerine, USP grade
RANGES: 0 to 15 psig through 0 to 600 psig
TEMPERATURE: -40 °F to 300 °F (-40 °C to 150 °C)



10 SERIES FRACTIONAL



NOSHOK FRACTIONAL SANITARY PRESSURE GAUGES are designed for compact applications within the food & beverage, dairy, pharmaceutical, and biomedical industry while meeting the current 3A standards and ASME BPE-2009. The wetted materials are electropolished 316L stainless steel to Ra25 microinch or better. Gauges can be cleaned in place (CIP), steamed in place (SIP) or autoclaved to reduce system shutdown time.

WARRANTY: (dry): One Year[†]; (liquid filled): Three Years[†]

SPECIFICATIONS

SIZE: 2-1/2" or 4"
CASE MATERIAL: 304 stainless steel
COVER RING: 304 stainless steel
LENS: Safety glass – STD
BOURDON TUBE: 316 stainless steel
ACCURACY: $\pm 1.5\%$ Full scale on 2-1/2" sizes; $\pm 1\%$ Full scale on 4" sizes
OPTIONAL FILL FLUID: glycerine or silicone
PROCESS CONNECTION: 1-1/2" or 2" clamped-style
SEAL HOUSING: 316L stainless steel
DIAPHRAGM MATERIAL: 316L stainless steel
SEAL FILL: Glycerine, USP grade
RANGES: Vacuum and compound through 0 to 600 psig
TEMPERATURE: -40 °F to 300 °F (-40 °C to 150 °C)

*C.I.P. S.I.P. and Autoclave



10 SERIES HEAVY DUTY



NOSHOK HEAVY DUTY SANITARY PRESSURE GAUGES meet the current standards for 3A and ASME BPE-2009. They are designed for applications throughout the pharmaceutical industry, food & beverage, dairy and biomedical industries. The available 1-1/2 or 2" clamped-style connections are constructed of 316L stainless steel welded to the all stainless steel 2-1/2" or 4" gauge for greater strength and durability. Wetted parts are electropolished to Ra 25 microinch or better.

WARRANTY: (dry): One Year[†]; (liquid filled): Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for Voltage Output
PROCESS CONNECTION: 1-1/2" or 2" clamped-style
SEAL HOUSING: 316L stainless steel
DIAPHRAGM MATERIAL: 316L stainless steel
SEAL FILL: White oil, USP grade
RANGES: Vacuum and compound through 0 to 400 psig
TEMPERATURE: -40 °F to 300 °F (-40 °C to 150 °C)

CE compliant to EMC norm EN 61326: 1997/A1 1998
 RFI, EMI and ESD



11 SERIES



NOSHOK Clamped-style SANITARY PRESSURE TRANSMITTERS utilize diffused semiconductor and proven sputtered thin film sensor technology to produce a highly accurate, stable, shock resistant and durable pressure transmitter. They are suited for applications in the food & beverage, dairy, biotechnology and pharmaceutical industries and meet the current 3A standards as well as ASME BPE-2009 and CE compliant. Wetted parts are 316L stainless steel and electropolished to Ra 25 or better. Can be cleaned in place (CIP) and steamed in place (SIP).

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for Voltage Output
PROCESS CONNECTION: 1-1/2" or 2" clamped-style
SEAL HOUSING: 316L stainless steel
DIAPHRAGM MATERIAL: 316L stainless steel
SEAL FILL: White oil, USP grade
RANGES: Vacuum and compound through 0 to 400 psig
TEMPERATURE: -40 °F to 300 °F (-40 °C to 150 °C)

CE compliant to EMC norm EN 61326: 1997/A1 1998; RFI, EMI and ESD



20 SERIES



NOSHOK HOMOGENIZER SANITARY GAUGES meet the current 3A standards and ASME BPE-2009. They are designed for high pressure applications in the dairy, food & beverage, pharmaceutical and biotechnology industries. The 4" all stainless steel gauge is welded to the flanged homogenizer connection. Wetted parts are 316L stainless steel and electropolished to Ra 25 or better. These gauges may be cleaned in place (CIP), steamed in place (SIP) or autoclaved to reduce process shutdown time.

WARRANTY: (dry): One Year[†]; (liquid filled): Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire
RANGES: STD gauge ranges from vacuum to 120,000 psi; absolute ranges also available
ACCURACY: $\pm 0.25\%$ Full scale (B.F.S.L.); $\pm 0.5\%$ Terminal Point; Optional $\pm 0.125\%$ Full scale (B.F.S.L.), $\pm 0.25\%$ Terminal Point
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output, 14 Vdc to 30 Vdc for Voltage Output
PROCESS CONNECTION: 1-1/8" homogenizer flange
SEAL HOUSING: 316L stainless steel
DIAPHRAGM MATERIAL: 316L stainless steel
SEAL FILL: White oil, USP grade
RANGES: 0-1,000 psig through 0-15,000 psig
TEMPERATURE: -40 °F to 300 °F (-40 °C to 150 °C)

CE compliant to EMC norm EN 61326: 1997/A1 1998; RFI, EMI and ESD



21 SERIES



NOSHOK HOMOGENIZER SANITARY PRESSURE TRANSMITTERS are high accuracy, heavy-duty transmitters that utilize proven sputtered thin film sensor technology to meet the demands of the dairy, food & beverage and pharmaceutical industries. These transmitters are shock resistant, highly accurate, stable and durable and meet the current standards for 3A, CE compliance and ASME BPE-2009. Wetted parts are 316L stainless steel and electropolished to Ra 25 or better. Can be cleaned in place (CIP) and steamed in place (SIP).

WARRANTY: Three Years[†]

[†]For further warranty information please consult your specific product catalogs.

DIAPHRAGM SEALS

SPECIFICATIONS

UPPER HOUSING: Universal Housing w/polypropylene, glass fiber reinforced

LOWER HOUSING: PVC-U, PP and PVDF

DIAPHRAGM: Teflon® (PTFE) diaphragms standard for 30 psi and greater; Viton® (FKM) diaphragms for 0-15 psi and vacuum assemblies

MAX WORKING PRESSURE: 160 psi

FILL: Silicone Fill



TYPE 5

NOSHOK REDUCED PRESSURE POLYMER DIAPHRAGM SEALS

are designed for wastewater and chemical feed applications, or any application with a corrosive media. These seals protect pressure or vacuum instruments used on ultra-pure or highly corrosive fluid lines such as demineralized water, sulfuric acid, hydrochloric acid, and caustics. Available 100% non-metallic construction assures maximum chemical and temperature compatibility.

WARRANTY: One Year†

SPECIFICATIONS

LOWER HOUSING: All metallic

UPPER HOUSING: Carbon steel or 316 stainless steel

DIAPHRAGM MATERIALS: All metallic or elastomers

O-RING: Buna-N®, Teflon®, Viton®

BOLTING: Carbon steel or 300 stainless steel series



TYPE 10

NOSHOK STANDARD PRESSURE CLAMPED-STYLE REPLACEABLE DIAPHRAGM SEALS

are designed to utilize a replaceable diaphragm clamped between the metal housings. They are rated to 2,000 psi with a displacement capability of 0.09" cu.

WARRANTY: One Year†

SPECIFICATIONS

LOWER HOUSING: All non-metallic

UPPER HOUSING: Carbon steel or 316 stainless steel

DIAPHRAGM MATERIALS: All metallic or elastomers

O-RING: Buna-N®, Teflon®, Viton®

BOLTING: Carbon steel or 300 stainless steel series



TYPE 10L

NOSHOK REDUCED PRESSURE CLAMPED-STYLE REPLACEABLE DIAPHRAGM SEALS

utilize a replaceable diaphragm and non-metallic lower housing. They are rated to 200 psi with a displacement capability of 0.09" cu.

WARRANTY: One Year†

SPECIFICATIONS

LOWER HOUSING: All metallic

UPPER HOUSING: Carbon steel or 316 stainless steel

DIAPHRAGM MATERIALS: All metallic

O-RING: Buna-N®, Viton®

BOLTING: Carbon steel or 300 stainless steel series



TYPE 10H & 10H1

NOSHOK ELEVATED PRESSURE CLAMPED-STYLE REPLACEABLE DIAPHRAGM SEALS

are a threaded connection, off-line seal with a replaceable diaphragm. They are designed for high pressure applications and are rated to 10,000 psi. Displacement capability is 0.05" cu.

WARRANTY: One Year†

SPECIFICATIONS

UPPER HOUSING: 316 stainless steel

DIAPHRAGM MATERIALS: 316 stainless steel

STAINLESS STEEL CLAMPED-STYLE: 1-1/2, 2-1/2 and 3" options

GASKET: Buna-N®, Teflon®



TYPE 12

NOSHOK Clamped-style® SANITARY PRESSURE CLAMPED-STYLE WELDED DIAPHRAGM SEALS

feature a flush mount diaphragm and all welded construction, making them ideal for food & beverage, pharmaceutical and sanitary markets. They have a minimum working pressure of -30 inHg to 0 psig through -30 inHg to 600 psig, and can accommodate process connection pipes from 1-1/2" through 3" sizes and 2-1/2, 4-1/2 and 6" gauge sizes. Their clamped connection allows ease of installation and removal of seal for maintenance and cleaning.

CAUTION: NOSHOK pressure transmitters are not to be used in heat sterilization systems as stated in 3A Standard 74-03 paragraph D10.1.2 Diaphragm seal must be installed facing downward or in a vertical position for drainability. Do not install diaphragm seal facing in an upward position.

WARRANTY: One Year†

SPECIFICATIONS

HOUSING: 316 stainless steel

DIAPHRAGM MATERIALS: 316 stainless steel



TYPE 20

NOSHOK FRONT FLUSH BUTTON STYLE CLAMPED-STYLE WELDED DIAPHRAGM SEALS

are constructed with a 316 stainless steel housing and diaphragm. Maximum pressure rating is 9,000 psi. Available instrument connection sizes are 1/4 and 1/2" with a process connection size of 1/2" NPT male to 2" NPT male.

WARRANTY: One Year†

†For further warranty information please consult your specific product catalogs.

SPECIFICATIONS

LOWER HOUSING: 316 stainless steel, Hastelloy C, Carpenter 20 and Monel
UPPER HOUSING: 316 stainless steel, Carpenter 20 and Monel
DIAPHRAGM MATERIALS: 316 stainless steel, Hastelloy C, Carpenter 20 and Monel



TYPE 25

NOSHOK STANDARD PRESSURE MINIATURE WELDED DIAPHRAGM SEALS utilize an all welded, all metallic housing design, pressure rated to 2,500 psi. The housing and diaphragm are offered in a variety of materials to suit most applications. A flushing port is offered as an option.

WARRANTY: One Year[†]

SPECIFICATIONS

LOWER HOUSING: 316 stainless steel, Hastelloy C, Carpenter 20 and Monel
UPPER HOUSING: 316 stainless steel, Carpenter 20 and Monel
DIAPHRAGM MATERIALS: 316 stainless steel, Hastelloy C, Carpenter 20 and Monel



TYPE 25H

NOSHOK ELEVATED PRESSURE MINIATURE WELDED DIAPHRAGM SEALS utilize an all welded, all metallic housing design, pressure rated to 5,000 psi. The housing and diaphragm are offered in a variety of materials to suit most applications. A flushing port is offered as an option.

WARRANTY: One Year[†]

SPECIFICATIONS

LOWER HOUSING: 316 stainless steel, Hastelloy C, and Monel
UPPER HOUSING: 316 stainless steel and Monel
DIAPHRAGM MATERIALS: 316 stainless steel, Hastelloy C, and Monel



TYPE 29

NOSHOK HIGH VOLUMETRIC DISPLACEMENT MINIATURE WELDED DIAPHRAGM SEALS are an all welded, all metallic housing design that does not utilize an O-ring or gasket. Displacement is limited to 0.035" cu. requiring the use of gauges with less than 4-1/2" dial size and bourdon tube range no lower than 0 to 15 psi. Pressure rating is 2,500 psi.

WARRANTY: One Year[†]

SPECIFICATIONS

LOWER HOUSING: All metallic
UPPER HOUSING: Carbon steel or 316 stainless steel
DIAPHRAGM MATERIALS: All metallic
BOLTING: Carbon steel or 300 stainless steel series



TYPE 30

NOSHOK STANDARD PRESSURE CLAMPED-STYLE WELDED DIAPHRAGM SEALS utilize an all metallic diaphragm welded to the upper housing with a displacement capability of 0.05" cu. Standard pressure rating is 2,500 psi with a wide variety of instrument and process connections available. A flushing connection is offered as an option.

WARRANTY: One Year[†]

SPECIFICATIONS

LOWER HOUSING: All metallic
UPPER HOUSING: Carbon steel or 316 stainless steel
DIAPHRAGM MATERIALS: All metallic
BOLTING: Carbon steel or 300 stainless steel series



TYPE 30H & 30H1

NOSHOK ELEVATED PRESSURE CLAMPED-STYLE WELDED DIAPHRAGM SEALS utilize an all metallic diaphragm welded to the upper housing with a displacement capability of 0.05" cu. Pressure rating is 5,000 psi to 10,000 psi with a wide variety of instrument and process connections available. A flushing connection is offered as an option.

WARRANTY: One Year[†]

SPECIFICATIONS

LOWER HOUSING: Non-metallic
UPPER HOUSING: Carbon steel or 316 stainless steel
DIAPHRAGM MATERIALS: All metallic
BOLTING: Carbon steel or 300 stainless steel series



TYPE 30L

NOSHOK REDUCED PRESSURE HIGH VOLUMETRIC DISPLACEMENT CLAMPED-STYLE WELDED DIAPHRAGM SEALS utilize an all metallic diaphragm welded to the upper housing. Displacement capability is 0.05" cu. with a 2.4" diameter diaphragm. Maximum pressure rating is 200 psi with non-metallic lower housing materials.

WARRANTY: One Year[†]

[†]For further warranty information please consult your specific product catalogs.

BIMETAL THERMOMETERS AND TEMPERATURE TRANSMITTERS

SPECIFICATIONS

SIZE: 2" and 3"
CASE: 304 stainless steel
BEZEL: 304 stainless steel
LENS: 2" – convex glass; 3" – Instrument glass
STEM: 304 stainless steel; 2.5" to 24" lengths available
CONNECTION: center back – STD; 2" – 1/4" NPT;
3" – 1/2" NPT, 3/8" NPT – Optional
ACCURACY: 2" – $\pm 1\%$ Full scale; 3" – $\pm 2\%$ -1% -2% Full scale
RANGES: -100 °F to 150 °F through 200 °F to 1,000 °F;
(-70 °C to 65 °C through -90 °C to 538 °C); Single and dual
scales available



100 SERIES

NOSHOK INDUSTRIAL TYPE BIMETAL THERMOMETERS are high quality, low cost thermometers designed for limited space applications or where a weather resistant, tamper proof case is required. The bimetal element is an extremely responsive temperature sensing helix which has been carefully sized and tested, heat treated and aged to relieve inherent stresses and insure continued accuracy.

WARRANTY: One Year[†]

SPECIFICATIONS

SIZE: 3" and 5"
CASE: 304 stainless steel
BEZEL: Electropolished 304 stainless steel
LENS: Instrument glass
STEM: 304 stainless steel; 2.5" to 24" lengths available
CONNECTION LOCATION: Center back; bottom connection;
adjustable angle connection
CONNECTION SIZE: 1/2" ENPT – STD;
1/4" NPT & 3/8" NPT – Optional
ACCURACY: $\pm 1\%$ Full scale
RANGES: -100 °F to 150 °F through 200 °F to 1,000 °F;
Single and Dual Scales available; (-70 °C to 65 °C through
-90 °C to 538 °C)

A silicone liquid filled option is available for applications where severe vibration may be a factor.



300 SERIES

NOSHOK INSTRUMENT TYPE BIMETAL THERMOMETERS are the highest quality thermometers available in today's market. They feature a sturdy, corrosion resistant 304 stainless steel case and bezel which provides a hermetic seal to prevent lens fogging and damage caused by moisture. A slotted hex adjustment head offers field calibration for maximum accuracy at a selected range.

WARRANTY: Three Years[†]

SPECIFICATIONS

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire; 0 Vdc to 10 Vdc,
3-wire
RANGES: STD ranges from -40 °F to 1,000 °F; (-40 °C to 538 °C)
ACCURACY: Class B ($\pm 0.5\%$ Full scale)
POWER SUPPLY: 10 Vdc to 30 Vdc for Current Output
14 Vdc to 30 Vdc for Voltage Output
HOUSING MATERIAL: 316 stainless steel
WETTED MATERIAL: 316 stainless steel
STEM LENGTHS: From 2.5" to 12" – Stock
PROCESS CONNECTION: 1/2" NPT male; 1/4" NPT available

CE compliant to EMC norm
EN 61326: 1997/A1 1998
RFI, EMI and ESD IP65, NEMA 4X (IEC 529)



800 SERIES

NOSHOK PLATINUM RESISTANCE TEMPERATURE TRANSMITTERS use the proven reliability and stability of the platinum 100 ohm sensor to provide unbeatable performance at an economical price.

Shown with 1800 Series Attachable Loop Indicator

WARRANTY: Seven Years[†]

SPECIFICATIONS

CASE: Stainless steel
WETTED PARTS: 316Ti stainless steel
CONNECTION: 1/2" NPT Male standard, 1/4" NPT optional
ACCURACY: Class B +0.1% of the temperature range
AVAILABLE RANGES: Standard ranges from -300 °F to 1,100 °F
(-200 °C to 600 °C)
SWITCHING FUNCTIONS: 2 N.O. or N.C. (PNP), 1 N.O. or N.C.
(PNP) with 4 mA to 20 mA analog output optional
POWER SUPPLY: 12 Vdc to 30 Vdc
ANALOG OUTPUT: 4 mA to 20 mA, scaleable from 20%
to 100% of range
ELECTRICAL CONNECTION: M12 x 1 (4-Pin)

CE compliant to EMC norm EN 61326: 1997/A1 1998
RFI, EMI and ESD



850 SERIES

NOSHOK ELECTRONIC INDICATING TEMPERATURE TRANSMITTER/SWITCHES measure and display temperature, and have one or two switching outputs as well as an optional analog output. The two buttons on top allow simple adjustment of the temperature set points, reset points, switching functions and the measuring range of the optional analog output. These extensive features and wide measuring range (between -300 °F and 1100 °F / -200 °C and 600 °C) cover the majority of temperature measuring and switching tasks. A variety of process connections, which are also available as adjustable screw connections, add to the versatility of the NOSHOK 850 Series. For rapid response times, a version with tapered stem is also available. All wetted parts, as well as the housing, are made of stainless steel. The housing and replaceable measuring insert are screwed together to allow the exchange of the measuring insert without opening the connection to the process.

WARRANTY: Three Years[†]

[†]For further warranty information please consult your specific product catalogs.

VAPOR ACTUATED REMOTE THERMOMETERS AND THERMOWELLS

SPECIFICATIONS

SIZES: 2, 2-1/2, 3-1/2, 4 and 4-1/2"

CASE MATERIAL: Brass or stainless steel (dry or liquid filled)

CONNECTION: Bottom connection; back connection; lower back connection

OPTIONAL FILL FLUIDS: Glycerine, Glycerine-H₂O and Silicone

MOUNTING OPTIONS: Front or rear flange, bezel & U-clamp

RANGES: -40 °F/C to 60 °F/C through 50 °F/C to 400 °F/C

CAPILLARY LENGTH & MATERIAL: Copper & stainless steel; 5 foot to 40 foot

BULB MATERIAL & DIMENSIONS: Copper or stainless steel; 2-5/8 Ex 3/8" through 7Ex 12" E



REMOTE THERMOMETERS

NOSHOK VAPOR ACTUATED REMOTE THERMOMETERS

operate using a temperature actuated liquid in the sensing element and a highly accurate, high quality pressure gauge to indicate media temperature. As the media temperature increases the capillary fill fluid vaporizes, causing an increase of pressure within the bourdon tube, and activates the movement and pointer for proper indication. Dial scale graduations are non linear, therefore, the highest degree of accuracy and readability is found in the upper half of the scale.

WARRANTY: One Year*

SPECIFICATIONS

MATERIALS: Brass, 304 stainless steel or 316 stainless steel

INSERTION: 1-5/8" to 22"

BORE DEPTH: 2-1/2" to 24"

PROCESS CONNECTION: 3/4" – STD;

Others available upon request



THERMOWELLS

NOSHOK THERMOWELLS are recommended whenever the process being measured may be under pressure, is corrosive, abrasive or may be at a high velocity. They are also recommended as protection to the operator. The correct thermowell will reduce the possibility of damage to the temperature instrument and allows an instrument to be removed and replaced without shutting down and possibly draining the process. Standard thermowells are supplied with 1/2" NPSM instrument connection. The female thread will accept the 1/2" NPT male thread without galling or seizing.

WARRANTY: One Year*

HYDRAULIC LOAD CELLS

SPECIFICATIONS

NOMINAL DIAMETER: 6cm²

LOAD CELL HOUSING MATERIAL: Stainless steel

PISTON: Stainless steel – STD; plastic – Optional

CONNECTING LINE: 50mm adapter – STD; others available

RANGES: From 150 lbs-force through 7,000 lbs-force

MEASURING INSTRUMENT

PRESSURE GAUGE: 2-1/2" 300 Series, one piece die cast brass case; dry or liquid filled

TRANSDUCER: 100, 200 or 615 Series transducer

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire

ACCURACY: ±0.125% Full scale (B.F.S.L) to ±1.5% Full scale

OPERATING TEMP: 14 °F to 122 °F (-10 °C to 50 °C)

AMBIENT TEMP: -4 °F to 140 °F (-20 °C to 60 °C)



1000 SERIES

NOSHOK 6cm² NOMINAL DIAMETER HYDRAULIC LOAD CELLS

are engineered with a compact flat body design for use within control systems of spot welding machines, robots, printing machines and other compression force measurement applications. The stainless steel housing and piston provide for exceptional corrosion resistance and extended service life. Accuracy levels range from ±0.125% Full scale (B.F.S.L) to ±1.5% Full scale depending on the measuring instrument.

WARRANTY: One Year*; Three Years* on liquid filled gauges & transducers

SPECIFICATIONS

NOMINAL DIAMETER: 20cm²

LOAD CELL HOUSING MATERIAL: Stainless steel

PISTON: Stainless steel

CONNECTING LINE: Direct connection – STD;

flexible tubing, capillary restrictor

RANGES: From 300 lbs-force through 22,000 lbs-force

MEASURING INSTRUMENT

PRESSURE GAUGE: 2-1/2" 300 Series, one piece die cast brass case; dry or liquid filled;

4" 901 Series stainless steel case; dry or liquid filled

TRANSDUCER: 100, 200 or 615 Series transducer

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire

ACCURACY: ±0.5% Full scale (B.F.S.L) to ±0.125% Full scale

OPERATING TEMP: 14 °F to 122 °F (-10 °C to 50 °C)

AMBIENT TEMP: -4 °F to 140 °F (-20 °C to 60 °C)



2000 SERIES

NOSHOK 20cm² NOMINAL DIAMETER HYDRAULIC LOAD CELLS

are designed for measuring axial loads and bearing forces in turning and drilling machines, extruders, and other compression or tension force applications. The self adapting piston and housing are constructed of high grade, corrosion resistant stainless steel and are available in standard or ring form. A high quality, highly accurate NOSHOK pressure gauge or transducer is attached for measurement indication.

WARRANTY: One Year*; Three Years* on liquid filled gauges & transducers

*For further warranty information please consult your specific product catalogs.

HYDRAULIC LOAD CELLS

SPECIFICATIONS

NOMINAL DIAMETER: 80cm²

LOAD CELL HOUSING MATERIAL: Stainless steel

PISTON: Stainless steel

CONNECTING LINE: Direct connection – STD; flexible tubing, capillary restrictor

RANGES: From 25,000 lbs-force through 70,000 lbs-force

MEASURING INSTRUMENT

PRESSURE GAUGE: 2-1/2" 300 Series, one piece die cast brass case; dry or liquid filled; 4" 901 Series stainless steel case; dry or liquid filled

TRANSDUCER: 100, 200 or 615 Series transducer

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire

ACCURACY: ±0.50% Full scale (B.F.S.L) to ±0.125% Full scale

OPERATING TEMP.: 14 °F to 122 °F (-10 °C to 50 °C)

AMBIENT TEMP.: -4 °F to 140 °F (-20 °C to 60 °C)



3000 SERIES

NOSHOK 80cm² NOMINAL DIAMETER HYDRAULIC LOAD

CELLS are constructed from a high grade, corrosion resistant stainless steel and joined with a high quality NOSHOK pressure gauge or transducer to measure axial loads and bearing forces in turning and drilling machines, extruders and other compression force measurement applications. Accuracy levels range from ±0.25% Full scale (B.F.S.L) to ±1.5% Full scale depending on the measuring instrument with measuring ranges from 25,000 lbs-force through 70,000 lbs-force.

WARRANTY: One Year[†]; Three Years[†] on liquid filled gauges & transducers

SPECIFICATIONS

NOMINAL DIAMETER: 100cm²

LOAD CELL HOUSING MATERIAL: Galvanized and chrome plated steel

PISTON: Stainless steel

CONNECTING LINE: Rigid tubing; flexible tubing, capillary restrictor

RANGES: From 230 lbs-force through 500,000 lbs-force

MEASURING INSTRUMENT

PRESSURE GAUGE: 4" 901 Series stainless steel case; dry or liquid filled; 6" 400/500 Series all stainless steel gauge

TRANSDUCER: 100, 200 or 615 Series transducer

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire

ACCURACY: ±0.50% Full scale (B.F.S.L) to ±0.125% Full scale

OPERATING TEMP.: 14 °F to 122 °F (-10 °C to 50 °C)

AMBIENT TEMP.: -4 °F to 140 °F (-20 °C to 60 °C)



4000 SERIES

NOSHOK 100cm² NOMINAL DIAMETER HYDRAULIC LOAD

CELLS are designed for level measurement, rope and belt tension and torque measurement, bearing support forces on lifting equipment and other compression force measurement applications. The cell housing is built from a durable galvanized and chrome plated steel while the piston is constructed from a high grade stainless steel for exceptional corrosion resistance. Measuring ranges vary from 230 lbs-force through 500,000 lbs-force with accuracy levels ranging from ±0.25% Full scale (B.F.S.L) to ±1% Full scale depending on the measuring instrument.

WARRANTY: One Year[†]; Three Years[†] on liquid filled gauges & transducers

SPECIFICATIONS

NOMINAL DIAMETER: 160cm²

LOAD CELL HOUSING MATERIAL: Stainless steel

PISTON: Stainless steel

CONNECTING LINE: Rigid tubing; flexible tubing, capillary restrictor

RANGES: From 900 lbs-force through 630,000 lbs-force

MEASURING INSTRUMENT

PRESSURE GAUGE: 4" 901 Series stainless steel case; dry or liquid filled; 6" 400/500 Series all stainless steel gauge

TRANSDUCER: 100, 200 or 615 Series transducer

OUTPUT SIGNALS: 4 mA to 20 mA, 2-wire: 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 1 Vdc to 5 Vdc, 1 Vdc to 6 Vdc & 1 Vdc to 11 Vdc, 3-wire

ACCURACY: ±0.50% Full scale (B.F.S.L) to ±0.125% Full scale

OPERATING TEMP.: 14 °F to 122 °F (-10 °C to 50 °C)

AMBIENT TEMP.: -4 °F to 140 °F (-20 °C to 60 °C)




5000 SERIES

NOSHOK 160cm² NOMINAL DIAMETER HYDRAULIC LOAD

CELLS are designed in a distinctive ring shaped form for compression and tension force measurement in injection molding machine screws, tailstock spindles, propeller shafts, rope and torque measurement applications and more. The high grade stainless steel housing and piston provide exceptional corrosion resistance and durability. Measuring ranges vary from 900 lbs-force through 630,000 lbs-force with accuracy levels ranging from ±0.25% Full scale (B.F.S.L) to ±1% Full scale depending on the measuring instrument.


WARRANTY: One Year[†]; Three Years[†] on liquid filled gauges & transducers

[†]For further warranty information please consult your specific product catalogs.

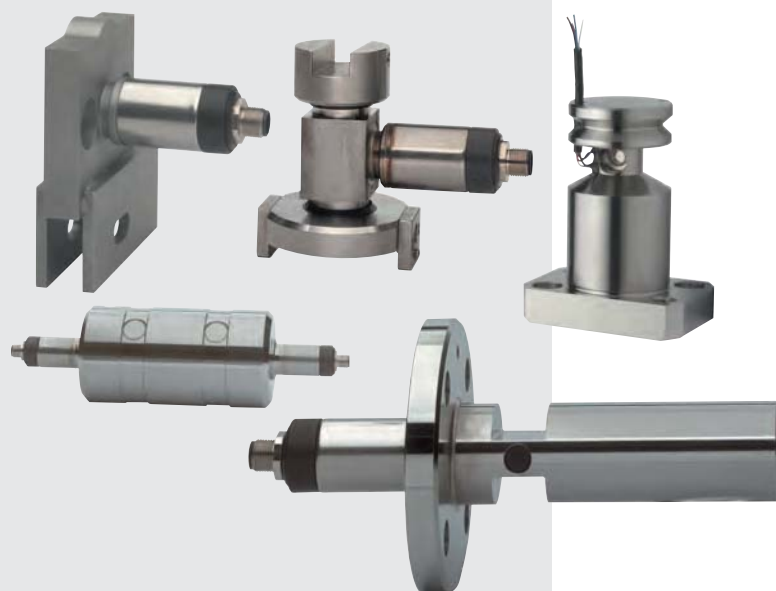

The **NOSHOK-TECSIS CUSTOM FORCE SENSOR** is a breakthrough in force measurement. Utilizing proven thin film sensor technology combined with an advanced automated production process we create a highly adaptive force transmitter that is suitable for industrial use. This development process gives the customer complete freedom in creating a high quality, highly accurate force sensor that is custom designed and engineered to meet their specific application needs.

NOSHOK-TECSIS Custom Force Sensors provide the OEM and end user alike with unsurpassed flexibility to achieve a previously unattainable solution because of nonconforming standard designs and high accuracy requirements. NOSHOK achieves this solution in a way that is performance and reliability enhancing while remaining cost effective.

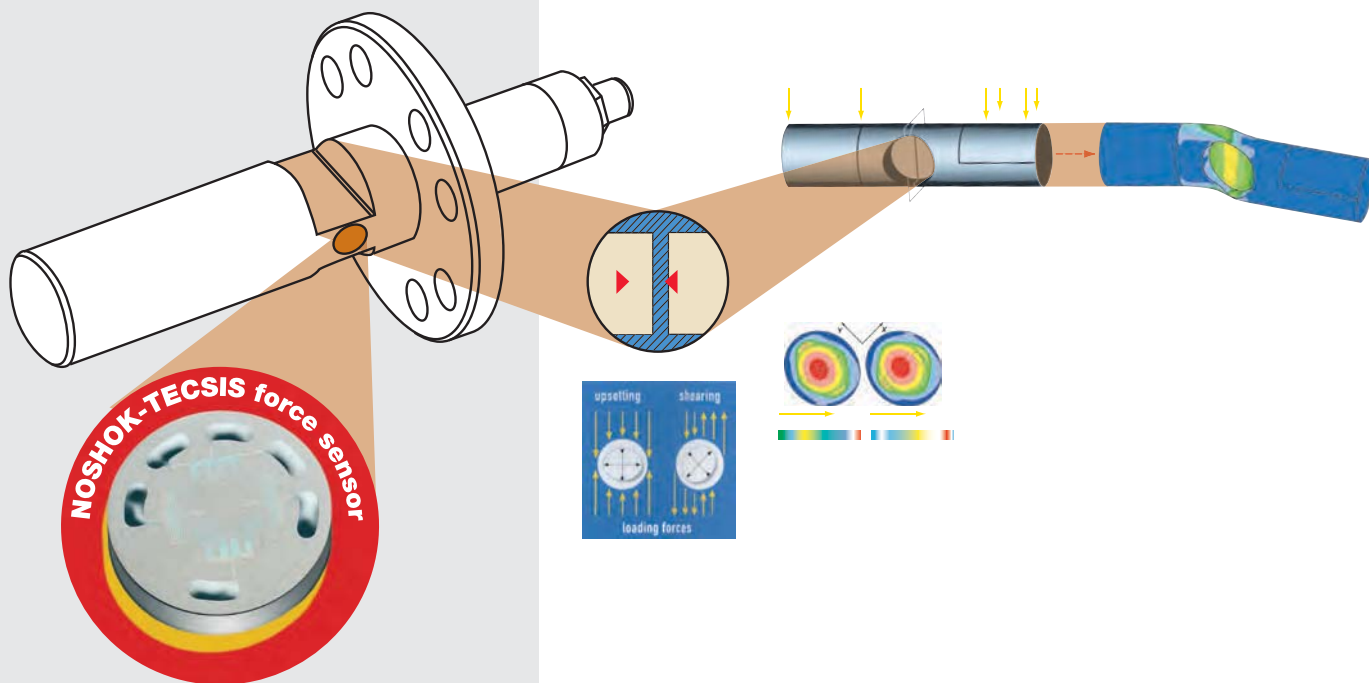

SPECIFICATIONS

OUTPUT SIGNAL: 4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire, 0 Vdc to 10 Vdc, 3-wire
NOMINAL RANGES: 1 kN (225lbs-force) to 500 kN (112,500lbs-force) Standard. Others available – please consult factory
LIMIT FORCE: 150% F_{nom}
FRACTURE FORCE: >300% F_{nom}
ACCURACY: < 1% Full scale
HYSTERESIS: < 0.5% Full scale
POWER SUPPLY: 10 Vdc to 30 Vdc; 14 Vdc to 30 Vdc for 0 Vdc to 10 Vdc output
HOUSING MATERIAL: 316 stainless steel
RESPONSE TIME: ≤ 0.5s (between 10% to 90% Full scale)
ENVIRONMENTAL RATING: IP 67, NEMA 4X to EN 60529/IEC 529
ELECTRICAL PROTECTION: Reverse polarity, over-voltage and short circuit protection
VIBRATION: 20g's per IEC 68-2
ELECTRICAL CONNECTION: M12 X 1, 4-pin standard;
 Others available – please consult factory

FEATURES

- Custom designed and built to the exact application specifications requiring less space for mounting and installation
- The NOSHOK-TECSIS proven thin film sensor is LASER WELDED to the deformation body for superior strength and performance
- Extremely accurate, with the help of Finite Element Method Analysis, the sensor is able to reach accuracies from 0.2% to 1% Full scale
- Available in a variety of standard current and voltage output signals, with others available upon request
- High quality product produced in an automated system with cost effective pricing
- Deformation body is constructed from a high grade, high quality stainless steel that provides exceptional durability and contributes to extended service life

FORCE TEST KITS AND LOAD PINS



NOSHOK CHAIN HOIST TEST KIT FOR FRICTION CLUTCH TESTING ON CHAIN HOISTS

The NOSHOK Chain Hoist Test Kit (CHTK) for overload cutoff is a precise, durable and dependable tester for slip couplings on chain hoists. The CHTK provides a wide range of measurement, with high accuracy, low weight and ease of use.

To perform the test, the force transducer is inserted into the chain, travels upwards with it against the base of the chain hoist and thereby blocks the chain. The display unit allows you to read the load at which the friction clutch stalls.

The CHTK consists of a force transducer with integrated handle and a display unit. Two chain adapters and three centering sleeves are also included in the kit, to ensure the CHTK can be used for most types of chain hoists in the specified load range. The large illuminated graphic display makes it very easy for the user to read the measured values. Optionally, 99 different data sets can be stored and transferred via an infrared interface to a PC. The CHTK's special feature is the single sensor concept for the entire load range.



NOSHOK WELD FORCE TEST KITS FOR MEASURING ELECTRODE FORCE ON SPOT WELDING EQUIPMENT

NOSHOK's Weld Force Test Kit (WFTK) is designed to easily and accurately check electrode force in spot welding equipment. The WFTK consists of a force transducer, a handheld display unit, plastic carrying case, charger, 2-meter signal cable and Manufacturer's Test Certificate. The WFTK weighs only 13 lbs, and features a Max/Min Value Memory, a large illuminated display, and electrode diameters of 14–20mm.

To check the force acting on the electrodes, the force transducer is held between the electrodes. The concave surfaces center the force transducer. When the welding electrodes come together, the magnitude of the applied force can be read on the display unit. The force transducer is insensitive to transverse forces and torques. It has a measuring range of 0–10kN. The output signal is connected to the handheld display unit via a cable. This display unit carries the voltage supply for the transducer. Alternatively, the supply can be taken from a PLC. The sensor, which is laser welded, has all the advantages of the conventional bonded foil strain gauges, but without having their substantial disadvantages (temperature drifts due to the glue and creeping).

SPECIFICATIONS

OUTPUT SIGNAL: 1-2 mV/V 4-wire, 4 mA to 20 mA 2-wire, 0 Vdc to 10 Vdc 3-wire, CANopen-fieldbus, others available on request

MEASURING RANGES: 0 kN to 5 kN through 0 kN to 200 kN

ACCURACY: $\pm 1.0\%$ Full scale to $\pm 0.5\%$ Full scale

HOUSING MATERIAL: 316 stainless steel

ENVIRONMENTAL PROTECTION: NEMA 4X,

IP67 per EN 60529/IEC 529

OPERATING TEMPERATURE: -40 °F to 176 °F (-40 °C to 80 °C)

ELECTRICAL PROTECTION: Reverse polarity, overvoltage and short circuit protection



5301/5308 SERIES

NOSHOK LOAD PINS utilize our proven thin film sensor technology laser welded directly to the measuring instrument. This technology gives us the ability to offer accuracies up to $\pm 0.5\%$ and minimize the disadvantages seen in the bonded foil versions (temperature drifts and long term stability). They are available in many different sizes and shapes for the direct replacement of existing bolts where a force measurement may need to be taken. Various output signals are available to integrate with almost any electrical system. Common applications for load pins are force measurement on roller bearings, industrial weighing, measurement of cable tension on hoists and overload protection on cranes.

[†]For further warranty information please consult your specific product catalogs.

SPECIFICATIONS

OUTPUT SIGNAL: 1-2 mV/V 4-wire, 4 mA to 20 mA 2-wire, 0 Vdc to 10 Vdc 3-wire, others available on request
MEASURING RANGES: 0 N to 5 N through 0 kN to 5,000 kN
ACCURACY: $\pm 2.0\%$ Full scale to $\pm 0.04\%$ Full scale
HOUSING MATERIAL: 316 stainless steel or aluminum, dependent on version
ENVIRONMENTAL PROTECTION: NEMA 4X, IP67 per EN 60529/IEC 529
OPERATION TEMPERATURE: -40 °F to 176 °F (-40 °C to 80 °C)
ELECTRICAL PROTECTION: Reverse polarity, overvoltage and short circuit protection



3540 SERIES

NOSHOK TENSION AND COMPRESSION FORCE TRANSDUCERS

are available in many different sizes and shapes to fit almost any application. They are available in measuring ranges as small as 0 N to 5 N and as high as 0 kN to 5,000 kN with accuracies from $\pm 2\%$ to $\pm 0.04\%$ depending on the version. Several outputs are available in both amplified and unamplified to interface with most electrical systems. Many versions are manufactured from stainless steel which makes them suitable for installation in harsh environments. Applications for use of this product include cable or rod tension, weight measurement, overload protection, clamping force and fill level measurement.

NEEDLE VALVES

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel, 360 brass
CONNECTIONS: 1/8" NPT, 1/4" NPT, 7/16"-20 UNF-2B, 9/16"-18 UNF-2B, Male-male, Male-female, Female-female, in-line and angled configurations
PRESSURE RATINGS: Brass: 6,000 psi @ 200 °F, zinc-nickel plated steel: 10,000 psi @ 200 °F, stainless steel: 10,000 psi @ 200 °F
ORIFICE SIZE: 100/140 Series & 150/190 Series: 0.172" Flow coefficient: 100/140 Series & 150/190 Series: C_v 0.42
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

100/140 Series: U.S. Patent 7,758,014

150/190 Series: U.S. Patent 6,820,857 and 7,758,014



100/140 SERIES 150/190 SERIES



NOSHOK MINI VALVES are small in size but deliver maximum strength and durability. Available in zinc nickel-plated steel, electropolished stainless steel and brass, these rugged mini valves are equipped with an FKM o-ring and PTFE back-up ring below the stem threads to protect against corrosion and galling. Stem threads are rolled for greater strength and ease of operation. 100/140 Series feature a metal-to-metal hard seat, and have a maximum pressure of 10,000 psi for stainless steel and steel models, and 6,000 psi for brass. 150/190 Series valves feature a patented Delrin® non-rotating soft tip stem. They have a max pressure of 6,000 psi for stainless steel and steel models, and 3,000 psi for brass.

WARRANTY: Three Years*

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel
CONNECTIONS: 1/2" NPT to 3/4" NPT Male-female
 Pressure rating: 200 Series: 10,000 psi @ 200 °F; 300 Series: 6,000 psi @ 200 °F
ORIFICE SIZE: 200/300 Series: 0.187"
FLOW COEFFICIENT: 200 Series: C_v 0.44; 300 Series: C_v 0.64
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.



HARD SEAT & SOFT SEAT

200/300 SERIES



NOSHOK MULTIPORT VALVES reduce the number of gauge and other instrument connections to permanent piping installations, therefore decreasing possible leak points (paths). Optional bleed plugs further allow pressure to be bled off without disturbing the permanent piping installation. The metal-to-metal hard seat design has a maximum pressure rating to 10,000 psi @ 200 °F. The soft seat design, with the replaceable Delrin® seat, is pressure rated to 6,000 psi @ 200 °F.

WARRANTY: Three Years*

*For further warranty information please consult your specific product catalogs.

NEEDLE VALVES

HARD SEAT & SOFT SEAT

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS: 1/4", 3/8", 1/2", 3/4", 1", 1-1/4" & 1-1/2" NPT; 7/16"-20 UNF (#4 SAE, J1926); Male-female, Female-female, in-line and angled configurations

PRESSURE RATING: 400 Series: 10,000 psi @ 200 °F; 500 Series: 6,000 psi @ 200 °F

ORIFICE SIZES: 400 Series: 1/4" - 1/2" NPT: 0.187" with Cv 0.44; 3/4" - 1-1/2" NPT: 0.438" with CV 2.70

ORIFICE SIZES: 500 Series: 1/4" - 1/2" NPT: 0.187"; with Cv 0.76; 3/4" - 1-1/2" NPT: 0.438" with Cv 4.0

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional for 1/4", 3/8" & 1/2" NPT only

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.



400/500 SERIES



NOSHOK STANDARD NEEDLE VALVES are the work horses of the industry. The 400 Series' metal-to-metal hard seat design is pressure rated to 10,000 psi @ 200 °F and helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability. The 500 Series valves are fitted with a precision molded, replaceable Delrin® soft seat which is the key to the bubble tight seal. They have a maximum pressure rating of 6,000 psi @ 200 °F with straight through porting for bi-directional, high capacity flow and easy roddable cleaning.

The all 316 stainless steel blow out proof stem provides greater service life and provides a secondary stem seal in the full open position. On the 400 Series, the stem and the one piece bonnet threads are rolled for greater strength and ease of operation. Both the 400 and 500 Series feature stem seal below the threads to protect against corrosion and galling.

WARRANTY: Three Years†

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS: 1/4" & 1/2" NPT,

Male-female & Female-female configurations

PRESSURE RATING: 600 Series: 10,000 psi @ 200 °F; 700 Series: 6,000 psi @ 200 °F

ORIFICE SIZE: 600/700 Series: 0.187" (both series)

FLOW COEFFICIENT: 600 Series: Cv 0.44;

700 Series: Cv 0.76

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.



HARD SEAT & SOFT SEAT

600/700 SERIES



NOSHOK BLOCK & BLEED NEEDLE VALVES allow pressure to be bled off without disturbing the permanent piping installation thereby enabling the user to quickly and easily remove and/or replace instruments. The metal-to-metal hard seat design is pressure rated to 10,000 psi @ 200 °F and the soft seat design, with a replaceable Delrin® seat, is rated to 6,000 psi @ 200 °F. The all 316 stainless steel blow out proof stem provides greater service life and a secondary stem seal in the full open position. Stem seals, with the FKM o-ring and PTFE back up ring, are below the threads and protect against galling and corrosion.

WARRANTY: Three Years†

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel, 360 brass

CONNECTIONS: 1/4" & 1/2" NPT

HARD SEAT PRESSURE RATINGS: Brass: 6,000 psi @ 200 °F; steel: 10,000 psi @ 200 °F; stainless steel: 10,000 psi @ 200 °F

SOFT TIP PRESSURE RATINGS: Brass: 3,000 psi @ 200 °F; steel: 6,000 psi @ 200 °F; stainless steel: 6,000 psi @ 200 °F

BLEED PORT: 800/850 Series: 0.159" (both series)

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® (800 Series only) packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857

U.S. Patent 7,758,014



HARD SEAT & SOFT TIP

800/850 SERIES



NOSHOK BLEED VALVES provide a convenient means to relieve process pressures trapped between a shut off valve and the instrument. The 800/850 Series valves use the same bonnet assemblies as the 100 and 150 Series mini valves with an integrated single threaded body for insertion into a vent port. NOSHOK Soft tip valves feature a patented Delrin® non-rotating soft tip stem, a back-up metal-to-metal seal and a 0.159" bleed port. Our patented body-to-bonnet, metal-to-metal seal is designed to significantly increase the pressure range of the valve. All stem threads are rolled for strength and ease of operation.

WARRANTY: Three Years†

†For further warranty information please consult your specific product catalogs.

NEEDLE VALVES & 2-VALVE STATIC PRESSURE MANIFOLDS

HARD SEAT & SOFT SEAT

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished
316 stainless steel
CONNECTION: 1/2" & 1/4" NPT, Male-female & Female-female configurations available, right venting optional
PRESSURE RATING: 2070 Series: 10,000 psi @ 200 °F; 2170 Series: 6,000 psi @ 200 °F
ORIFICE SIZE: 2070/2170: 0.187" (both series)
FLOW COEFFICIENT: 2070 Series: Cv 0.44; 2170 Series: Cv 0.76
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
LENGTH: 4" standard and 5-3/8" extended length available
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips
All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.
All NOSHOK valves are 100% helium leak tested to 1 X 10⁻⁴ ml/s for guaranteed performance and reliability.



2070/2170 SERIES



NOSHOK BLOCK & BLEED 2-VALVE NEEDLE VALVES combine isolating and venting in a single valve, eliminating the need for tubing and fittings. The block valve isolates the downstream process fluids, and the bleed valve exhausts upstream fluids enabling instruments to be removed without disturbing the permanent piping installation. The 1/4" NPT vent plug may be removed and replaced with exhaust piping to direct the fluids to a safe location. The metal-to-metal hard seat design is pressure rated to 10,000 psi @ 200 °F and the soft seat design, with a replaceable Delrin® seat, is rated to 6,000 psi @ 200 °F. The all 316 stainless steel blow out proof stem provides greater service life and a secondary stem seal in the full open position. The standard stem seal is below the threads and protects against galling and corrosion.

WARRANTY: Three Years[†]

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished
316 stainless steel
CONNECTION: 1/2" & 1/4" NPT Male-female & Female-female configurations available, right venting optional
PRESSURE RATING: 10,000 psi @ 200 °F
ORIFICE SIZE: 0.187"
FLOW COEFFICIENT: Cv 0.44
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
LENGTH: 4" standard and 5-3/8" extended length available
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips
All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.
All NOSHOK valves are 100% helium leak tested to 1 X 10⁻⁴ ml/s for guaranteed performance and reliability.



3070 SERIES



NOSHOK DOUBLE BLOCK & BLEED 2-VALVE NEEDLE VALVES combine double isolation and venting in a single valve, eliminating the need for tubing and fittings. The double block and bleed valve isolates the downstream process fluids, or isolates the upstream instrument pressure. The bleed valve exhausts either upstream or downstream fluid pressure depending on which block valve is used. The 1/4" NPT vent port is located on the opposite side of the process block valve and 90° from the instrument block valve. 10,000 psi hard seat pressure rating @ 200 °F. Blow-out proof stem provides a secondary stem seal in the full open position. All stem threads are rolled for strength and ease of operation. These valves feature a one-piece bonnet with a metal-to-metal seal to the valve body below the bonnet threads, and a slotted spring pin to prevent accidental loosening. Vinyl dust cap for bonnet and stem (non-packing).

WARRANTY: Three Years[†]

HARD SEAT & SOFT SEAT

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished
316 stainless steel
CONNECTION: 1/2" NPT, 1/4" NPT, NPT-flange, Flange-flange, NPT-NPT configurations available
PRESSURE RATINGS: 2000 Series: 10,000 psi @ 200 °F; 2100 Series: 6,000 psi @ 200 °F
ORIFICE SIZE: 0.187"
FLOW COEFFICIENT: 2000 Series: Cv 0.44; 2100 Series: Cv 0.76
STEM SEAL & TYPES: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips
All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.
All NOSHOK valves are 100% helium leak tested to 1 X 10⁻⁴ ml/s for guaranteed performance and reliability.



2000/2100 SERIES



NOSHOK BLOCK & BLEED 2-VALVE STATIC PRESSURE MANIFOLD VALVES combine isolating and venting in a single manifold eliminating the need for tubing and fittings. The block valve isolates the downstream process fluids and the bleed valve exhausts upstream fluids enabling static pressure transmitters, switches or gauges to be removed without disturbing the permanent piping installation. The block valve is located on the side and the bleed valve is located on top in a 90° orientation. Venting is to the right. The all 316 stainless steel blow out proof stem provides longer service life and a secondary stem seal in the full open position. The stem seal, with the FKM o-ring and PTFE back up ring, is below the threads and protects against galling and corrosion.

WARRANTY: Three Years[†]

[†]For further warranty information please consult your specific product catalogs.

2-VALVE STATIC PRESSURE MANIFOLDS

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS: Flange-flange, 1/2" NPT-flange

PRESSURE RATINGS: 2020 Series: 10,000 psi @ 200 °F; 2120 Series: 6,000 psi @ 200 °F

ORIFICE SIZE: 0.187"

FLOW COEFFICIENT: 2020 Series: C_v 0.44;


2120 Series: C_v 0.76

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

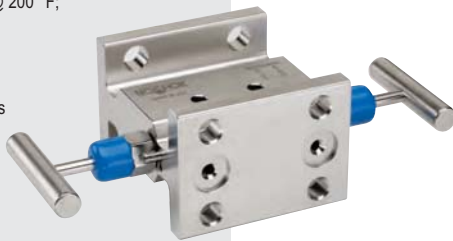

HARD & SOFT SEAT

2020/2120 SERIES



NOSHOK 2-VALVE LIQUID LEVEL MANIFOLD VALVES

are designed for use with differential pressure transmitters in liquid level applications. These valves are available in either single flange or double flange connection for direct installation. The soft seat design features a replaceable Delrin® seat with straight through porting for bi-directional flow and easy roddable cleaning.

WARRANTY: Three Years†

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS:

200002/210002 Series: Flange-flange, 1/4" NPT vent;

200402/210402 Series: 1/2" NPT-flange, 1/4" NPT vent;

200202/210202 Series: 1/4" NPT-flange,

1/4" NPT vent; Left venting optional

PRESSURE RATINGS:

200002 & 200402 Series: 10,000 psi @ 200 °F;

210002 & 210402 Series: 6,000 psi @ 200 °F

Orifice size: 0.187"

FLOW COEFFICIENT:

200002 & 200402 Series: C_v 0.44;

210002 & 210402 Series: C_v 0.76

STEM SEAL: All 316 stainless steel stems

with FKM o-ring and type PTFE back-up


ring below the threads, PTFE or

Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

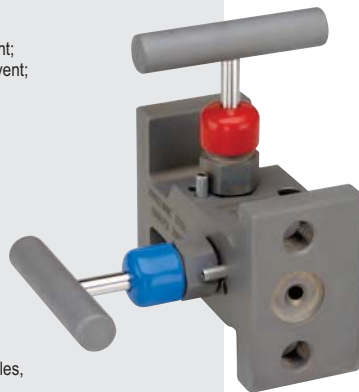

HARD SEAT & SOFT SEAT

200002/210002 SERIES 200402/210402 SERIES



NOSHOK NARROW BLOCK & BLEED 2-VALVE STATIC PRESSURE MANIFOLD VALVES

combine isolating and venting in a single manifold eliminating the need for tubing and fittings. The block valve isolates the downstream process fluids and the bleed valve exhausts upstream fluids enabling static pressure transmitters, switches or gauges to be removed without disturbing the permanent piping installation. The block valve is located on the side and the bleed valve is located on top in a 90° orientation. Venting is to the right. The all 316 stainless steel blow out proof stem provides greater service life and a secondary stem seal in the full open position. The stem seal, with the FKM o-ring and PTFE back up ring, is below the threads and protects against galling and corrosion.

WARRANTY: Three Years†

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS: 1/4" NPT, 1/8" NPT, right venting optional

PRESSURE RATINGS:

2602 Series: 10,000 psi @ 200 °F;

2702 Series: 6,000 psi @ 200 °F

ORIFICE SIZE: 0.141"

FLOW COEFFICIENT: 2602 Series: C_v 0.38;

2702 Series: C_v 0.38

STEM SEAL & TYPE: All 316 stainless steel

stems with FKM o-ring and PTFE back-up

ring below the threads, PTFE or

Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857

U.S. Patent 7,758,014



HARD SEAT & SOFT TIP (0.141" ORIFICE)

2602/2702 SERIES



NOSHOK MINI BLOCK & BLEED 2-VALVE STATIC PRESSURE MANIFOLD VALVES

combine isolating and venting in a single manifold eliminating the need for tubing and fittings. The block valve isolates the downstream process fluids and the bleed valve exhausts upstream fluids enabling static pressure transmitters, switches or gauges to be removed without disturbing the permanent piping installation. The valves are located on the top to fit into compact spaces and two holes are provided for mounting. Venting is to the left. The all 316 stainless steel blow out proof stem provides greater service life and a secondary stem seal in the full open position. The stem seal, with the FKM o-ring and PTFE back up ring, is below the threads and protects against galling and corrosion.

WARRANTY: Three Years†

†For further warranty information please consult your specific product catalogs.

2-VALVE STATIC PRESSURE & LIQUID LEVEL MANIFOLDS

HARD SEAT & SOFT TIP (0.156" ORIFICE)

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS:

2603/2703 Series: 3/8" NPT;
2604/2704 Series: 1/2" NPT, right venting optional

PRESSURE RATINGS:

2603 & 2604 Series: 10,000 psi @ 200 °F;
2703 & 2704 Series: 6,000 psi @ 200 °F

ORIFICE SIZE:

0.156"

FLOW COEFFICIENT:

Cv 0.44

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857; U.S. Patent 7,758,014



2603/2703 SERIES 2604/2704 SERIES

NOSHOK BLOCK & BLEED 2-VALVE STATIC PRESSURE MANIFOLDS

combine isolating and venting in a single manifold eliminating the need for tubing and fittings. The block valve isolates the downstream process fluids and the bleed valve exhausts upstream fluids enabling static pressure transmitters, switches or gauges to be removed without disturbing the permanent piping installation. The block valve is located on the side and the bleed valve is located on top in a 90° orientation. Venting is to the left. The all 316 stainless steel blow out proof stem provides greater service life and a secondary stem seal in the full open position. The stem seal, with the FKM o-ring and PTFE back up ring, is below the threads and protects against galling and corrosion.

WARRANTY: Three Years†



SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTION:

1/4" NPT

PRESSURE RATING: 6,000 psi @ 200 °F

ORIFICE SIZE:

0.187"

FLOW COEFFICIENT:

Cv 0.76

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.



2180 SERIES

NOSHOK 2-VALVE STATIC PRESSURE NATURAL GAS METER MANIFOLDS

are designed for use with orifice meters. These manifolds feature a replaceable Delrin® seat and straight through porting for bidirectional, high capacity flow and easy roddable cleaning. A blow-out proof stem provides a secondary stem seal in the full open position, and all stem threads are rolled for strength and ease of operation. These valves feature a one-piece bonnet with a metal-to-metal seal to the valve body below the bonnet threads, and a slotted spring pin to prevent accidental loosening. Vinyl dust caps are included for bonnets and stems (non-packing).

Optional 3 and 5 valve configurations also shown.
Additional needle valves sold separately.

WARRANTY: Three Years†



3-VALVE DIFFERENTIAL PRESSURE MANIFOLDS

HARD SEAT & SOFT SEAT

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTION: Flange-flange, 1/2" NPT-flange, 1/2" NPT-1/2" NPT

PRESSURE RATINGS: 3010 Series: 10,000 psi @ 200 °F;
3110 Series: 6,000 psi @ 200 °F

ORIFICE SIZE:

0.187"


FLOW COEFFICIENT: 3010 Series: Cv 0.44;
3110 Series: Cv 0.76

STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional

OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

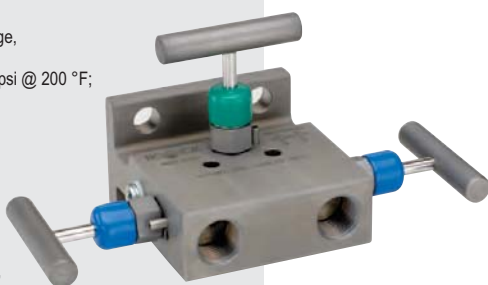

3010/3110 SERIES

NOSHOK 3-VALVE DIFFERENTIAL PRESSURE MANIFOLD VALVES

are designed for use with differential pressure transmitters incorporating two isolation valves and an equalizing valve in differential pressure measurement. These valves are available in block, single flange or double flange connection for remote or direct installation. The soft seat design features a replaceable Delrin® seat with straight through porting for bi-directional flow and easy roddable cleaning.

WARRANTY: Three Years†



†For further warranty information please consult your specific product catalogs.

3-VALVE DIFFERENTIAL PRESSURE MANIFOLDS

SOFT SEAT (0.375" ORIFICE)

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel
CONNECTION: Flange-flange, 1/2" NPT-flange, 1/2" NPT-1/2" NPT
PRESSURE RATINGS: 6,000 psi @ 200 °F
ORIFICE SIZE: 0.375"
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.



3510 SERIES

NOSHOK 3-VALVE DIFFERENTIAL PRESSURE MANIFOLD VALVES are designed for use with differential pressure transmitters incorporating two isolation valves and an equalizing valve in differential pressure measurement. These valves are available in block, single flange or double flange connection for remote or direct installation. The soft seat design features a replaceable Delrin® seat with straight through porting for bi-directional flow and easy roddable cleaning.

WARRANTY: Three Years[†]



HARD SEAT & SOFT TIP (0.141" ORIFICE)

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel
CONNECTION: 1/4" NPT
PRESSURE RATINGS:
3610 Series: 10,000 psi @ 200 °F;
3710 Series: 6,000 psi @ 200 °F
ORIFICE SIZE: 0.141"
FLOW COEFFICIENT: C_v 0.44
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads, PTFE or Grafoil® packing optional
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857; U.S. Patent 7,758,014



3610/3710 SERIES

NOSHOK MINI 3-VALVE DIFFERENTIAL PRESSURE MANIFOLD VALVES are identical to the 3000/3100 Series Manifold Valves, but in miniature version. They are designed for use with differential pressure transmitters incorporating two isolation valves and an equalizing valve in differential pressure measurement.

WARRANTY: Three Years[†]



5-VALVE NATURAL GAS MANIFOLDS

HARD SEAT & SOFT SEAT/TIP


SPECIFICATIONS

MATERIALS: Zinc-nickel plated carbon steel, electropolished 316 stainless steel
CONNECTION: Flange-flange, 1/2" NPT-flange, 1/2" NPT-1/2" NPT
PRESSURE RATINGS:
5030 Series: 10,000 psi @ 200 °F;
5130 Series: 6,000 psi @ 200 °F
ORIFICE SIZE: 0.187"
FLOW COEFFICIENT:
5030 Series: C_v 0.44; 5130 Series: C_v 0.76
STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads.
ADDITIONAL FEATURES: Two static (test) ports, color coded vinyl bonnet and stem dust cap, patented soft seat/tip stem design on equalizing and vent valves
OPTIONS: Panel mountings, o-ring materials, handles, packings, regulating stem and stem tips seal

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857; U.S. Patent 7,758,014

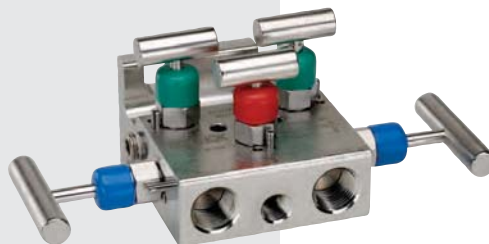

5030/5130 SERIES

NOSHOK 5-VALVE NATURAL GAS MANIFOLDS are designed for use with differential pressure transmitters incorporating two isolation valves, two equalizing valves and a vent valve in natural gas applications. These valves are available in block, single flange or double flange connection for remote or direct installation. The soft seat design features a replaceable Delrin® seat with straight through porting for bi-directional flow and easy roddable cleaning*.

*Isolation valves only

WARRANTY: Three Years[†]



[†]For further warranty information please consult your specific product catalogs.

5-VALVE NATURAL GAS MANIFOLDS

SOFT SEAT/TIP (0.375" ORIFICE)

SPECIFICATIONS

MATERIALS: Zinc-nickel plated steel, electropolished 316 stainless steel

CONNECTIONS: Flange-flange, 1/2" NPT-flange, 1/2" NPT-1/2" NPT

PRESSURE RATINGS: 6,000 psi @ 200°F

ORIFICE SIZE: 0.375"


STEM SEAL & TYPE: All 316 stainless steel stems with FKM o-ring and PTFE back-up ring below the threads

ADDITIONAL FEATURES: Two static (test) ports, color coded vinyl bonnet and stem dust cap, patented soft tip stem design on equalizing and vent valves

All NOSHOK valve products conform to the MSS SP-99 instrument valves standards, and valves supplied with packing also conform to MSS SP-132 compression packing systems for instrument valves standard.

All NOSHOK valves are 100% helium leak tested to 1×10^{-4} ml/s for guaranteed performance and reliability.

U.S. Patent 6,820,857

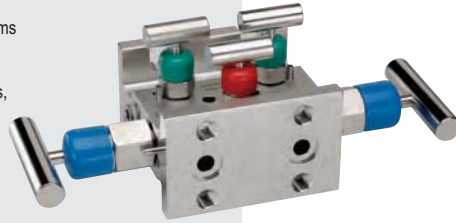

5530 SERIES



NOSHOK 5-VALVE NATURAL GAS MANIFOLDS are designed for use with differential pressure transmitters incorporating two isolation valves, two equalizing valves and a vent valve in natural gas applications. These valves are available in block, single flange or double flange connection for remote or direct installation. The soft seat design features a replaceable Delrin® seat with straight through porting for bi-directional flow and easy roddable cleaning*.

*Isolation valves only

WARRANTY: Three Years†

VALVE ACCESSORIES

PRESSURE TO STATIC ADAPTER PLATE

Used in direct mount systems for gas pipelines, the pressure to static adapter plate is used to mount a differential pressure transmitter and a static pressure transmitter to a five valve flange-flange manifold. They are available in zinc-nickel plated steel or electropolished stainless steel. An integral mini style bleed valve is incorporated in the plate and a 1/4" NPT vent plug is provided. The mini style bleed valve is equipped with a Viton® o-ring and Teflon® back up ring below the stem threads to protect against corrosion and galling. Stem threads are rolled for greater strength and ease of operation and all NOSHOK valves are 100% helium leak tested for guaranteed reliability. Maximum pressure rating of 10,000 psi for steel & stainless steel models.

DIELECTRIC KIT

The dielectric kit is designed to maintain the integrity and reliability of the pipeline and piping system through safety and corrosion protection.

Dielectric kits provide a non-conductive barrier between the process piping and the instrument and isolate components from the effects of electrical current. By eliminating metal-to-metal contact, current is halted to prevent corrosion and aid in the cathodic protection of the system.



SPECIFICATIONS

MATERIAL: Delrin®, PVC

MAX OPERATING TEMP: 150° F (66° C)

DIELECTRIC STRENGTH: Exceeds 1/32 air arc gap approx 2,500 Vdc

MANIFOLD MOUNTING KIT

Designed for direct or remote mounting to a 2" pipe stand, can be utilized with any NOSHOK 2, 3 or 5 valve manifold by mounting a steel or stainless steel bracket directly to the manifold body.



STATIC ADAPTERS

The static adapter is used to join threaded ports to a flange style connection. They are often used to join the NPT port of a static transmitter with a flange mounted connection on a differential pressure to static adapter plate. They are available in zinc-nickel plated steel and electropolished stainless steel.

SPECIFICATIONS

MATERIAL: Zinc-nickel plated steel, electropolished stainless steel,

CONNECTIONS: 1/2" NPT male - Flange

FUTBOLS

Futbols (flange adapters) bolt to the process side of a flange-flange manifold to allow connection of process flange taps or process root valves.

Futbols also allow flanges to be connected to threaded process piping while maintaining the ease of removal or repair of the manifold if maintenance is required. The futbols provide a 1/16" offset connection from the bolt holes to give connection centers of 2, 2-1/8, or 2-1/4"



SPECIFICATIONS

MATERIAL: Yellow zinc dichromate plated steel, 316 stainless steel

CONNECTIONS: 1/2" NPT

KIT INCLUDES: (2) Futbols, (4) hex bolts 7/16-20, (2) Teflon® face seals

†For further warranty information please consult your specific product catalogs.

NOTES



A series of horizontal lines for taking notes, overlaid with a large, faint, stylized graphic of the letters 'V' and 'O' in a light gray color.

TO DOWNLOAD OR ORDER CATALOGS,
VISIT WWW.NOSHOK.COM

Quality Policy

NOSHOK is
committed to providing
a high degree of value and continually
improving processes to improve customer
satisfaction by focusing on customer
requirements for the design, manufacture
and distribution of pressure, temperature,
and force measurement instruments
along with needle and
manifold valves.

All from world class technology.

Combined with real-world stamina.

The highest value with the industry's best warranty.

And all from a company with a 45+ year record of customer satisfaction.

All from your Single Source Instrumentation Company.



Corporate Headquarters

1010 West Bagley Road
Berea, Ohio 44017
Ph: 440.243.0888
Fax: 440.243.3472
E-mail: noshok@noshok.com
Web: www.noshok.com

